SABINE RIVER AUTHORITY OF TEXAS

TO: INTERESTED PARTIESFROM: ENVIRONMENTAL SERVICES DIVISIONRE: NOVEMBER 2021 MONTHLY WATER QUALITY REPORT

The Environmental Services Field Offices conducted water quality monitoring in the Sabine Basin from November 15th through the 18th. The results of field monitoring are presented in this report¹ and additional data can be found using the Texas Commission on Environmental Quality (TCEQ) <u>Clean Rivers Program Data Tool</u>.

Sabine Basin Tidal (Including Tributaries)

Weather – Air temperatures in the tidal basin were variable with highs in the low 60s to upper 70s. Low temperatures were in the low 40s to mid 50s. The tidal stations received 0 inches of rainfall in the seven days prior to the sampling event.

Tidal Conditions – Surface salinity values were greater than 1 ppt at five of the seven tidal stations. The highest salinity value of 8.2 ppt was recorded at station 10391(SRT1) at a depth of 5.5 meters.

Lower Sabine Basin (Toledo Bend Reservoir and the Sabine River downstream to Tidal)

Weather – Air temperatures in the lower basin were variable with highs in the upper 60s to mid 70s. Low temperatures were in the low 40s to low 50s. Toledo Bend received 0.86 inches of rainfall during the seven days prior to the sampling event.

Lake Level - The level of Toledo Bend was 167.67 feet with a daily average discharge of 260 cfs on the day of sampling. Toledo Bend has a conservation pool level of 172 feet msl. Reservoir profiles indicate a mixed water column.

Upper Sabine Basin (Lake Tawakoni, Lake Fork Reservoir, and the Sabine River upstream of Toledo Bend)

Weather - Air temperatures in the upper basin were mild with highs in the mid 70s to low 60s. Low temperatures were in the upper 30s to low 50s. Lake Fork and Lake Tawakoni received 0.65 and 0.63 inches of rainfall during the seven days prior to sampling, respectively.

Lake Level - The level of Lake Tawakoni was 435.93 feet msl with a release of 6 cfs on the day of sampling. The level of Lake Fork was 400.37 feet msl with a 20 cfs release on the day of sampling. Lake Tawakoni and Lake Fork have conservation pool levels of 437.5 feet msl and 403 feet msl, respectively. Reservoir profiles at Lake Fork and Lake Tawakoni indicated a mixed water column.

This report and additional links to data for these monitoring stations are available at the <u>Sabine River Authority of Texas</u> <u>website</u>. If you have any questions or comments concerning this report, please contact:

- Pollie Holtham, Environmental Services Division Manager 409-746-3284 (<u>pholtham@sratx.org</u>)
- Lower and Tidal Sabine Basin
 Jerry Wiegreffe, Environmental Services Assistant Division Manager
 409-746-3284 (jwiegreffe@sratx.org)
- Upper Sabine Basin
 Terry Wilson, Upper Basin Field Office Coordinator
 903-878-2420 (twilson@sratx.org)

¹ Data in this report is considered preliminary until it is available in TCEQ's Surface Water Quality Monitoring Information System database.

SABINE RIVER AUTHORITY OF TEXAS Monthly Water Quality Report


Table of Contents

Fixed Monitoring Stations	
Segment 0501 – Sabine River Tidal	5
Segment 0502 - Sabine River Above Tidal	7
Segment 0503 - Sabine River Above Caney Creek	
Segment 0504 – Toledo Bend Reservoir	9
Segment 0505 - Sabine River Above Toledo Bend Reservoir	
Segment 0506 - Sabine River Below Lake Tawakoni	
Segment 0507 - Lake Tawakoni	

Table of Figures

Sabine Basin Map	3
Segment 0501	6
Segment 0502	7
Segment 0503	
Гоledo Bend Reservoir Profiles 1	
Segment 0504	3
Segment 0505	4
Lake Fork Reservoir Profiles1	
Segment 0506	8
Lake Tawakoni Reservoir Profiles 2	0
Segment 0507	

Sabine Basin Map

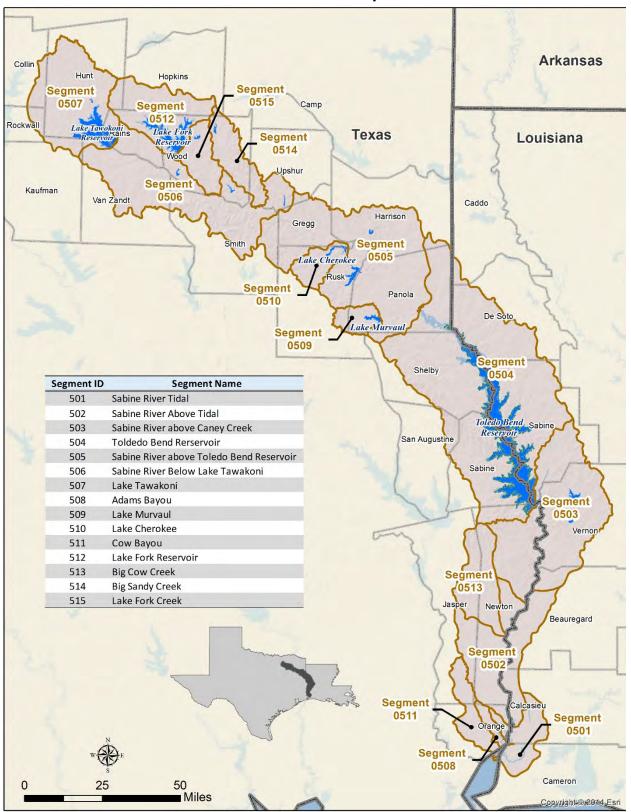

Current Fixed Monitoring Stations

Segment	Station TCEQ ID (SRA-TX ID)	Location
501	10391 (SRT1)	SABINE RIVER AT CHANNEL CAN 3
501	15654 (BB1)	BLACK BAYOU IN CAMERON PARISH
511	10449 (CB1)	COW BAYOU AT ROUNDBUNCH ROAD
508	10441 (AB2)	ADAMS BAYOU AT FM 1006
501	15653 (ICW1)	INTERCOASTAL WATERWAY AT PERRY RIDGE
501	10394 (SRT2)	SABINE RIVER AT IH 10
501	10395 (SR1)	SABINE RIVER 12.00 KM UPSTREAM OF IH 10
502	10397 (SR2)	SABINE RIVER AT SH 12 NORTH OF DEWEYVILLE TX.
513	10465 (BCC1)	BIG COW CREEK AT FM 1416 SOUTH OF BON WIER
503	10398 (SR3)	SABINE RIVER AT US 190 EAST OF BON WIER TX.
503	10340 (BA4)	ANACOCO BAYOU AT LOUISIANA HWY 111 CROSSING SOUTHWEST OF KNIGHT LA.
503	10399 (SR5)	SABINE RIVER AT SH 63 EAST OF BURKEVILLE TX.
503	10401 (TB6S)	SABINE RIVER BELOW TOLEDO BEND RESERVOIR AT RIGHT ABUTMENT OF SPILLWAY FOR DAM
503	15660 (BT1)	BAYOU TORO AT LA SH 392 IN SABINE PARISH SW OF HORNBECK LA.
504	10404 (TB6A)	TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL
504	10406 (TB6C)	TOLEDO BEND RESERVOIR IN SIX MILE BOAT LANE 0.8KM EAST OF SH 87
504	18054 (TB6Q)	TOLEDO BEND RESERVOIR IN NEGREET BAYOU
504	10411 (TB6F)	TOLEDO BEND RESERVOIR IN SUNSHINE BAY NEAR FM 3121 BRIDGE
504	10402 (TB6H)	TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM
504	15659 (TB6K)	TOLEDO BEND RESERVOIR IN LANANA BAYOU AT LOUISIANA SH 191 IN SABINE PARISH LOUISIANA WEST OF MANY
504	15655 (TB6J)	TOLEDO BEND RESERVOIR PATROON BAYOU BRANCH AT FM 276
504	18053 (TB6LN)	TOLEDO BEND RESERVOIR SAN MIGUEL ARM BOAT LANE
504	18052 (TB6R)	TOLEDO BEND RESERVOIR AT RAGTOWN
505	10415 (SR10)	SABINE RIVER AT FM 2517
505	13628 (SR11)	SABINE RIVER AT US 59
505	10427 (SR16)	SABINE RIVER AT SH 42
506	10428 (SR17)	SABINE RIVER AT US 271
506	10429 (SR19)	SABINE RIVER AT SH 14 S. OF HAWKINS
506	10430 (SR21)	SABINE RIVER AT US 69
514	10468 (BS1)	BIG SANDY CREEK AT SH 155
515	10469 (LF20)	LAKE FORK CREEK AT US 80
512	10458 (LF2)	LAKE FORK RESERVOIR NEAR DAM IN CREEK CHANNEL
512	10462 (LF4)	LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM 515
512	10461 (LF3)	LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM 515
507	10434 (LT23A)	LAKE TAWAKONI IN THE MAIN LAKE NEAR THE DAM
507	21173 (LT23DN)	LAKE TAWAKONI IN WACO BAY EQUIDISTANT FROM FINGER AND SPRING POINTS 1.17KM BEARING 18.61 DEGREES FROM IRON BRIDGE PUMPING STATION
507	10437 (LT23B)	LAKE TAWAKONI AT SH 276

Segment 0501 – Sabine River Tidal


Description: The designated segment includes the Sabine River from the confluence with Sabine Lake in Orange County to West Bluff in Orange County. Although some areas are quite rural, this part of the Sabine Basin has two cities with populations greater than 5,000 and a variety of industries.

Segment 0508 – Adams Bayou Tidal. The segment reaches from the confluence with the Sabine River in Orange County to a point 1.1 kilometers (0.7 miles) upstream of IH-10 in Orange County.

Segment 0511 – Cow Bayou Tidal. The segment reaches from the confluence with the Sabine River in Orange County to a point 4.8 kilometers (3.0 miles) upstream of IH-10 in Orange County.

Segment 0501 Water Quality

Date and Time	Station											
		Depth	Temp	Hd	DO	% Sat	Cond	TDS	Salinity	Secchi	Turbidity	Enterococcus
		meters	°C	SU	mg/L		µS/cm	mg/L	ppt	meters	NTU	mpn/ 100mL
11/18/21 09:34	10391(SRT1)	0.3	19.6	7.2	7.7	86	8,430	5,410	4.7	0.67	7.99	<10
		1.5	19.7	7.3	7.7	86	9,430	6,040	5.3			
		2.5	19.7	7.3	7.7	86	10,200	6,440	5.8			
		5.5	20.1	7.4	7.3	84	14,200	9,100	8.2			
		7.5	20.6	7.1	< 0.1	<1	6,660	4,270	3.7			
11/18/21 09:11	15654(BB1)	0.3	20.5	7.3	7.0	82	14,200	9,080	8.2	0.82	7.04	146
		1.5	20.5	7.3	7.0	81	14,200	9,080	8.2			
		3.5	20.5	7.3	7.0	81	14,200	9,090	8.2			
Segmen	t 0511											
11/18/21 08:49	10449(CB1)	0.3	20.4	7.0	7.8	88	6,940	4,440	3.8	0.55	7.05	20
		2.0	20.2	7.1	7.1	80	8,620	5,600	4.9			
		4.0	19.8	7.1	6.6	75	11,400	7,270	6.5			
Segmen	t 0508											
11/18/21 10:03	10441(AB2)	0.3	20.2	7.0	7.3	82	6,580	4,200	3.6	0.70	6.87	<10
		2.0	20.2	7.0	6.9	77	7,540	4,660	4.1			
		4.0	19.9	7.1	6.6	75	9,650	9,630	5.4			
11/18/21 10:26	15653(ICW1)	0.3	19.8	7.2	7.4	82	9,610	6,140	5.4	0.39	20.0	41
		2.0	19.8	7.2	7.3	82	9,600	6,150	5.4			
		4.0	19.8	7.2	7.3	82	9,600	6,140	5.4			
		6.0	19.8	7.2	7.3	82	9,600	6,140	5.4			
11/18/21 11:25	10394(SRT2)	0.3	18.1	7.0	7.0	74	1,010	652	0.5	0.42	19.2	10
		2.0	18.1	7.0	6.9	72	1,060	683	0.6			
		4.0	18.1	7.1	6.7	71	1,150	772	0.7			
		6.0	19.2	6.8	3.8	42	10,100	6420	5.8			
		8.0	19.6	6.7	3.8	43	12,100	7710	6.9			
11/18/21 12:04	10395(SR1)	0.3	18.7	7.2	7.1	75	334	214	0.2	0.31	29.0	10

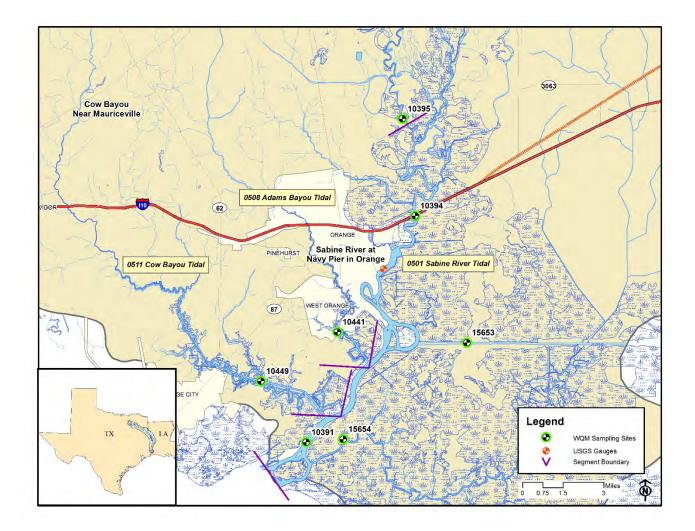

Segment 0502 - Sabine River Above Tidal

Description: The designated segment includes the Sabine River from West Bluff in Orange County to the confluence with Caney Creek in Newton County. The largest tributary is Big Cow Creek (Segment 0513). This is largely a rural area with no major industries or cities.


Segment 0513 – Big Cow Creek. The segment reaches from the confluence with the Sabine River in Newton County to a point 4.6 kilometers (2.9 miles) upstream of CR 255 in Newton County.

Segment 0502 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/17/21 08:03	10397(SR2)	08030500	Sabine River near Ruliff, TX	1,190

Segments 0502 and 0513 Water Quality

Date and Time	Station	Depth	Temp	pН	DO	%	Cond	TDS	Secchi	Turbidity	E.coli
		meters	°C	SU	mg/L	Sat	µS/cm	mg/L	meters	NTU	mpn/100mL
11/17/21 08:03	10397(SR2)	0.3	17.7	7.1	8.4	88	146	93	0.32	20.8	14
Segmen	nt 0513										
11/17/21 09:14	10465(BCC1)	0.3	15.9	6.3	9.0	91	38	24	0.58	10.6	42

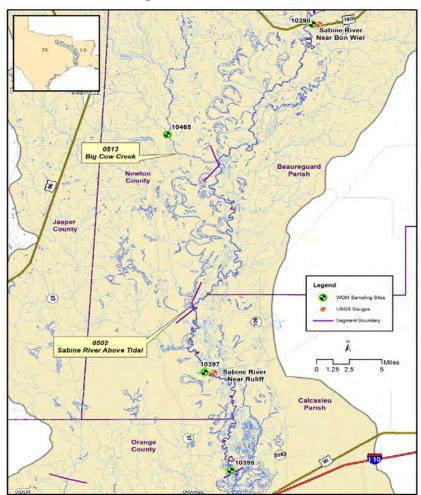

Segments 0502 & 0513

Segment 0503 - Sabine River Above Caney Creek


Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence with Caney Creek in Newton County up to Toledo Bend Dam in Newton County. This is largely a rural area, including one major city with a population greater than 5,000 and few industries. Two major tributaries that flow from Louisiana include Bayou Anacoco and Bayou Toro.

Segment 0503 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/17/21 12:00	10398(SR3)	08028500	Sabine River near Bon Wier, TX	679
11/17/21 10:53	10399(SR5)	08026000	Sabine River near Burkeville, TX	318

Segment 0503 Water Quality

Date and Time	Station	Depth	Temp	pН	DO	%	Cond	TDS	Secchi	Turbidity	E.coli
		meters	°C	SU	mg/L	Sat	$\mu S/cm$	mg/L	meters	NTU	mpn/100mL
11/17/21 12:00	10398(SR3)	0.3	19.0	7.4	8.9	96	208	133	0.31	15.5	6
11/17/21 11:37	10340(BA4)	0.3	18.7	7.4	6.3	68	546	350	0.25	21.3	8
11/17/21 10:53	10399(SR5)	0.3	18.3	7.2	9.3	99	124	80	0.52	11.7	20
11/15/21 12:40	10401(TB6S)	0.3	20.2	7.9	9.6	105	148	94	>1.2	1.83	10
11/15/21 12:21	15660(BT1)	0.3	12.5	7.2	10.2	95	86	55	0.49	14.7	52

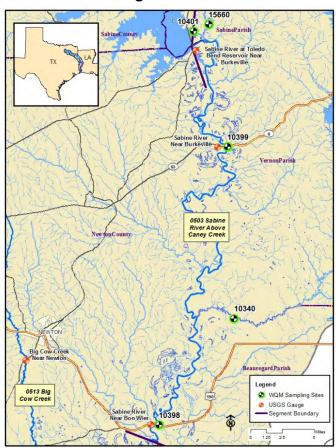

Segment 0504 – Toledo Bend Reservoir

Description: The designated segment includes the Sabine River from Toledo Bend Dam in Newton County to a point immediately upstream of the confluence of Murvaul Creek in Panola County. Although this area is largely rural, it includes two cities with populations greater than 5,000. Murvaul Creek is a major tributary that enters upstream of the reservoir.

Date and Time	Station	Depth	Temp	pН	DO	% Sat	Cond	TDS	Secchi	Turbidity	E.coli
		meters	°C	SU	mg/L		$\mu S/cm$	mg/L	meters	NTU	mpn/100mL
11/16/21 15:10	10404(TB6A)	0.3	19.3	7.3	8.0	86	148	95	1.6	1.97	2
		1.0	19.3	7.2	7.9	85	148	95			
		2.0	19.0	7.2	7.6	82	147	95			
		3.0	18.9	7.2	7.6	81	147	94			
		4.0	18.9	7.2	7.6	81	148	95			
		5.0	18.9	7.2	7.5	81	147	95			
		8.0	18.8	7.2	7.6	81	148	95			
		11.0	18.9	7.2	7.7	82	148	95			
		14.0	18.8	7.2	7.5	80	148	95			
		17.0	18.7	7.2	7.4	78	148	95			
		20.0	18.6	7.2	7.3	78	148	95			
		23.0	18.5	7.2	6.3	68	148	95			
		25.0	17.8	7.1	< 0.1	<1	212	136			
11/16/21 08:04	10406(TB6C)	0.3	17.7	7.5	9.3	97	142	91	0.90	6.15	<1
		1.0	17.7	7.5	9.3	97	142	91			
		2.0	17.7	7.5	9.1	96	142	91			
		3.0	17.7	7.4	9.0	94	142	91			
11/16/21 13:55	18054(TB6Q)	0.3	19.2	7.8	9.5	102	150	96	1.4	2.63	<1
		1.0	19.2	7.8	9.5	102	150	96			
		2.0	19.1	7.8	9.4	101	150	96			
		3.0	19.0	7.7	9.3	100	149	96			
		4.0	19.0	7.7	9.3	100	150	96			
		5.0	19.0	7.7	9.2	99	149	95			
		6.0	18.9	7.6	9.2	99	149	96			
		7.0	18.9	7.6	9.2	98	150	97			


Segment 0504 Water Quality

Segment 0504 Water Quality Continued


Date and Time	Station	Depth meters	°C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/15/21 10:23	10411(TB6F)	0.3	17.5	7.9	9.3	97	138	88	0.61	6.07	<1
11,10,21 10120	10111(1201)	1.0	17.3	7.8	9.3	97	137	88	0101	0107	
		2.0	17.2	7.8	9.2	95	137	88			
		3.0	17.1	7.7	9.2	95	137	88			
		4.0	17.1	7.7	9.1	94	137	88			
11/16/21 11:15	10402(TB6H)	0.3	18.3	7.6	9.0	95	152	97	1.2	3.08	<1
		1.0	18.3	7.6	9.0	95	152	97			
		2.0	18.2	7.5	8.7	93	152	97			
		3.0	18.1	7.5	8.6	91	152	98			
		4.0	18.1	7.4	8.4	89	152	97			
		5.0	18.0	7.3	8.1	85	153	98			
		6.0	17.9	7.3	7.9	83	153	98			
		7.0	17.8	7.2	7.0	73	153	98			
		8.0	17.8	7.2	7.0	74	154	98			
		9.0	17.8	7.2	7.1	74	153	99			
		10.0	17.7	7.2	7.1	80	153	99			
		11.0	17.7	7.3	7.1	74	154	98			
		12.0	17.7	7.3	7.1	75	154	98			
		13.0	17.7	7.4	7.1	74	154	98			
11/15/21 10:52	15659(TB6K)	0.3	18.1	8.5	10.2	107	154	99	0.59	4.92	1
		1.0	18.1	8.5	10.2	107	154	99			
		2.0	18.1	8.5	10.2	107	154	99			
		3.0	17.9	8.4	10.0	104	154	99			
		4.0	17.6	8.2	9.7	100	156	100			
		5.0	16.9	7.9	9.0	92	158	101			
		6.0	16.7	7.7	8.7	88	158	102			
		7.0	16.6	7.6	8.5	87	159	102			
		8.0	16.5	7.6	8.4	85	159	102			
11/15/21 09:46	15655(TB6J)	0.3	17.5	8.5	9.9	102	156	100	0.58	4.69	<1
		1.0	17.2	8.4	9.9	102	156	100			
		2.0	17.0	8.4	9.7	100	157	101			
		3.0	16.9	8.2	9.6	98	157	101			
		4.0	16.9	8.0	9.0	92	157	100			

Segment 0504 Water Quality Continued


Date and Time	Station	Depth	°C	pH SU	DO	% Sat	Cond	TDS	Secchi	Turbidity NTU	E.coli
		meters	C	30	mg/L		µS/cm	mg/L	meters	NIU	mpn/100mL
11/16/21 12:55	18053(TB6LN)	0.3	18.2	8.2	9.9	105	151	97	0.83	4.67	<1
		1.0	18.2	8.2	9.9	104	151	97			
		2.0	18.2	8.2	9.9	105	152	97			
		3.0	18.0	8.1	9.7	102	151	96			
		4.0	17.8	7.9	9.2	96	150	96			
		5.0	17.6	7.7	8.7	92	150	96			
11/16/21 09:37	18052(TB6R)	0.3	17.1	7.8	9.1	93	174	111	0.99	5.04	<1
		1.0	17.1	7.8	9.1	94	174	111			
		2.0	17.1	7.7	9.0	93	174	111			
		3.0	17.0	7.7	8.9	92	174	111			
		4.0	17.0	7.7	8.9	92	174	111			
		5.0	16.9	7.6	8.8	91	174	112			
		6.0	16.9	7.6	8.6	89	175	112			
		7.0	16.8	7.6	8.4	87	177	113			
		8.0	16.8	7.5	8.3	86	176	113			
		9.0	16.8	7.5	8.4	86	176	113			
		10.0	16.8	7.5	8.3	85	177	113			
		11.0	16.9	7.5	8.2	85	176	113			
		12.0	16.8	7.4	7.8	81	178	113			
		13.0	16.7	7.4	6.9	71	177	113			

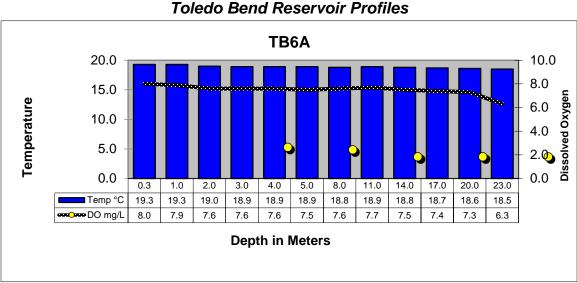


TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL

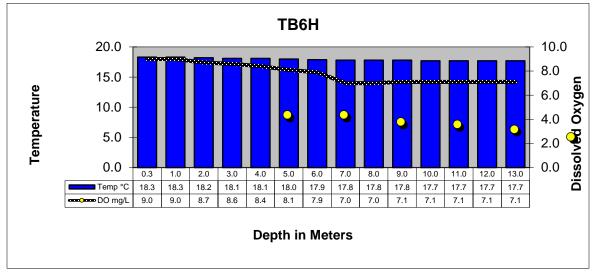

TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM

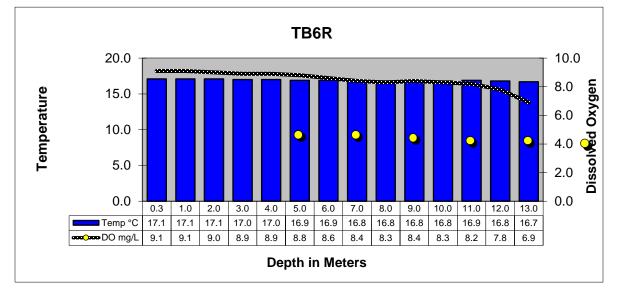

TOLEDO BEND RESERVOIR AT RAGTOWN

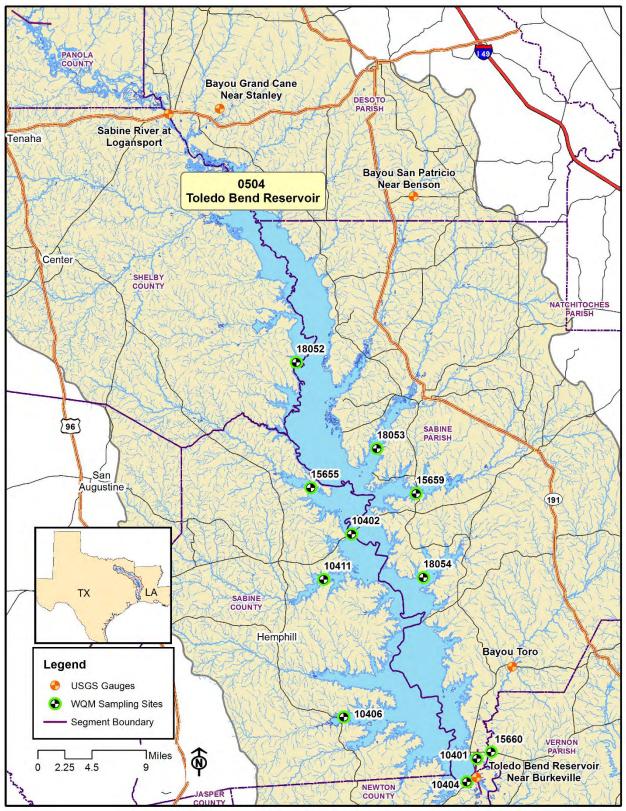

Segment 0505 - Sabine River Above Toledo Bend Reservoir


Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence of Murvaul Creek in Panola County to a point 100 meters (110 yards) downstream of US 271 in Gregg County. Segment 0505 is used extensively for water supply and contains the highest concentration of population in the Sabine Basin with eight cities having populations greater than 5,000. Segment 0505 includes a large section of the East Texas Oilfield as well as numerous industries.

Segment 0505 USGS Recorded Flows

_					
	Date and Time	Station	USGS Station #	Location	Flow (cfs)
	11/17/2021 09:37	13628(SR11)	08022040	Sabine River near Beckville, TX	367

Segment 0505 Water Quality

Date and Time	Station	Depth	Temp	pН	DO	% Sat	Cond	TDS	Secchi	Turbidity	E. coli
		meters	°C	SU	mg/L		μS/cm	mg/L	meters	NTU	mpn/100mL
11/17/2021 10:10	10415(SR10)	0.3	16.5	7.6	10.1	105	425	272	0.21	7.94	8
11/17/2021 09:37	13628(SR11)	0.3	16.2	7.4	9.5	99	352	225	0.20	36.2	14
11/17/2021 08:10	10427(SR16)	0.3	15.1	7.3	9.3	93	178	114	0.22	41.1	126

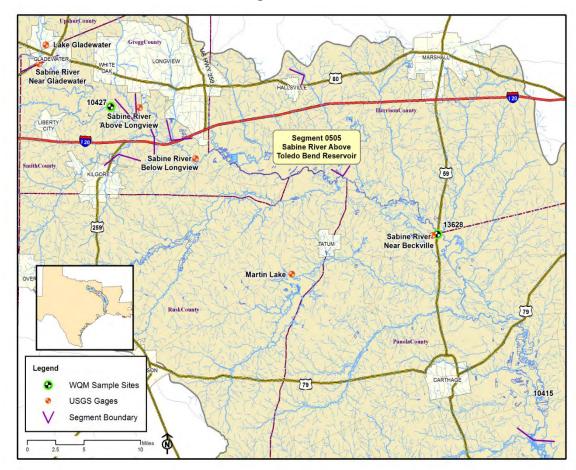

Segment 0506 - Sabine River Below Lake Tawakoni

Description: The designated segment includes the Sabine River from a point 100 meters (110 yards) downstream of US 271 in Gregg County to Iron Bridge Dam in Rains County. This is largely a rural area with no cities having a population greater than 5,000. Oilfield activities, rural housing developments, and agriculture are in the watershed. The major tributaries include:

Segment 0514 - Big Sandy Creek. The segment reaches from the confluence with the Sabine River in Upshur County to a point 2.6 kilometers (1.6 miles) upstream of SH 11 in Hopkins County.

Segment 0515 - Lake Fork Creek. The segment reaches from the confluence with the Sabine River in Wood County to Lake Fork Dam in Wood County.

Segment 0512 - Lake Fork Reservoir. The segment reaches from Lake Fork Dam in Wood County up to the normal pool elevation of 403 feet.

Segment 0500 0505- Recorded Flows											
Date and Time	Station	USGS Station #	Location	Flow (cfs)							
11/17/2021 07:50	10428(SR17)	08020000	Sabine River near Gladewater, TX	367							
11/17/2021 07:00	10429(SR19)	08019200	Sabine River near Hawkins, TX	102							
11/16/2021 14:45	10430(SR21)	08018500	Sabine River near Mineola, TX	33							
Segmen	t 0514										
11/17/2021 07:20	10468(BS1)	08019500	Big Sandy Creek near Big Sandy, TX	48							

Segment 0506 USGS- Recorded Flows

Segment 0506 Water Quality


Date and Time	Station	Depth meters	°C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
11/17/2021 07:50	10428(SR17)	0.3	15.1	7.3	9.4	94	183	117	0.27	36.1	71
11/17/2021 07:00	10429(SR19)	0.3	14.3	7.5	9.3	93	252	162	0.31	40.1	38
11/16/2021 14:45	10430(SR21)	0.3	13.8	7.6	9.2	91	162	103	0.20	56.1	78
Segment	Segment 0514										
11/17/2021 07:20	10468(BS1)	0.3	14.5	7.1	8.8	87	107	69	1.2	8.35	40
Segment 0515											
11/16/2021 15:05	10469(LF20)	0.3	14.4	7.5	9.9	98	165	106	NR	39.1	54

*NR = No Result


Segment 0506 Water Quality Continued

Date and Time	Station	Depth meters	°C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
Segment 0512											
11/16/2021 13:00	10458(LF2)	0.3	17.3	7.1	7.4	78	154	98	0.82	6.06	1
					ofile da						
				incle	ement v	veathe	r				
							1				
11/16/2021 12:02	10462(LF4)	0.3	16.6	7.5	8.0	92	155	99	0.57	9.63	<1
		1.0	16.6	7.5	8.0	91	155	99			
		2.0 3.0	16.5 16.5	7.2 7.1	8.0 8.0	91 91	155 155	99 99			
		4.0	16.3	7.1	7.9	91	155	99 99			
		5.0	16.3	7.1	7.9	90	155	99			
		6.0	16.2	7.1	7.0	86	155	99			
		7.0	16.2	7.0	6.8	82	155	99			
		8.0	16.2	7.0	6.8	82	155	99			
		9.0 10.0	16.1 16.0	7.0 7.0	6.8 6.8	81 81	155 155	99 99			
		11.0	15.9	7.0	6.6	77	155	99			
11/16/21 12:20	10461(LF3)	0.3	17.0	7.6	9.0	94	154	98	0.54	11.6	<1
		1.0	16.9	7.4	8.8	92	154	98			
		2.0	16.8	7.3	8.7	92	154	98			
		3.0	16.8	7.2	8.7	92 88	154	98			
		4.0 5.0	16.7 16.6	7.2 7.1	8.6 7.7	88 77	154 154	98 98			
		6.0	16.3	6.9	7.0	72	154	98			
		7.0	16.2	6.9	7.0	72	154	98			
		8.0	16.2	6.9	6.9	72	154	98			


Lake Fork Reservoir Profiles

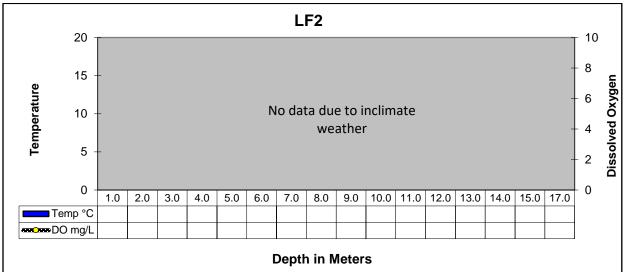



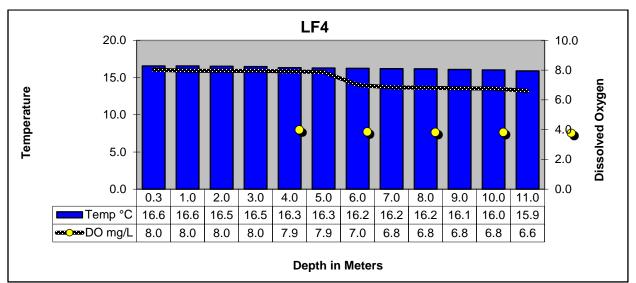


LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM515

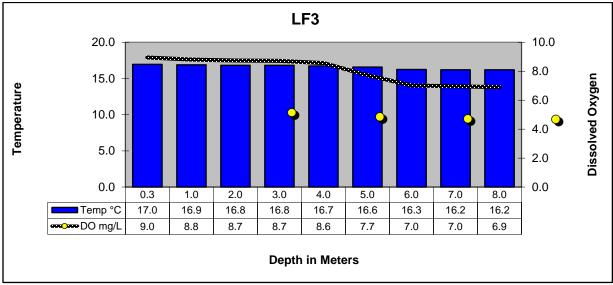

LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM515

Segments 0506, 0512, 0514 & 0515

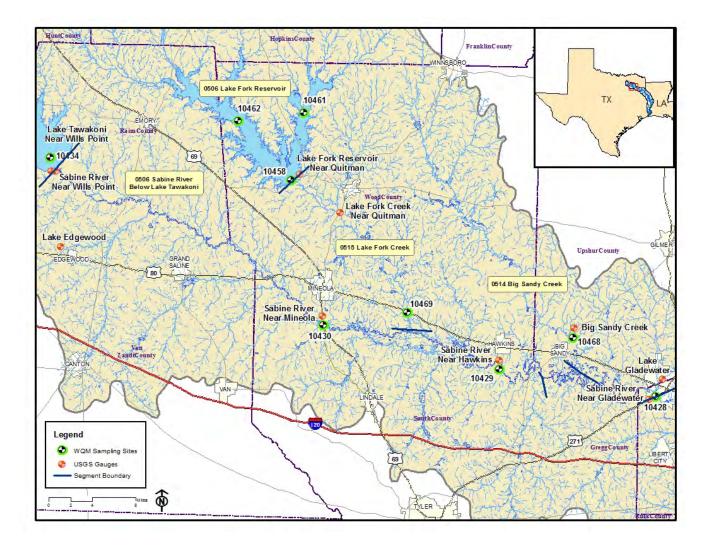


Segment 0507 - Lake Tawakoni


Description: The designated segment includes the impounded Sabine River from Iron Bridge Dam in Rains County up to the normal pool elevation of 437.5 feet. Although much of this segment is rural, it contains two cities with populations greater than 5,000 and one of the four largest cities in the Sabine Basin.


Segment 0507 Water Quality

Date and Time	Station	Depth meter s	°C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
11/16/2021 10:45	10434(LT23A)	0.3	16.7	7.9	9.3	98	191	122	0.37	7.53	<1
				Io mad	Ela dat	o duo	to				
			No profile data due to inclement weather								
					1	r	1				
11/16/2021 10:00	21173(LT23DN)	0.3	16.4	8.0	8.9	92	193	123	0.32	9.7	1
			N	In man	Ela dat	o duo	to				
			Г	incler	file data	a due eather					
					1	1					
11/16/2021 11:25	10437(LT23B)	0.3	16.4	8.3	9.3 9.2	96 95	192	123	0.38	15.1	<1
		1.0 2.0	16.4 16.4	8.1 8.0	9.2 9.2	95 95	192 192	123 123			
		3.0	16.4	7.9	9.2	95	192	123			
		4.0	16.4	7.9	9.2	95	192	123			
		5.0	16.4	7.9	9.2	95	192	123			
		6.0	16.4	7.9	9.2	95	192	123			
		7.0	16.4	7.9	9.1	95	192	123			
		8.0	16.4	7.9	9.1	94	192	123			


Lake Tawakoni Reservoir Profiles

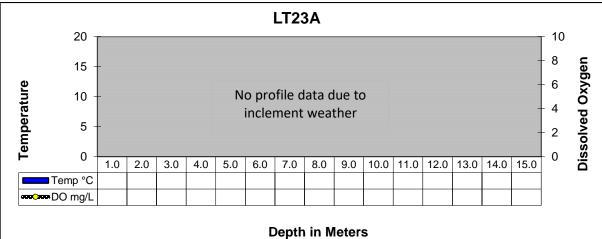



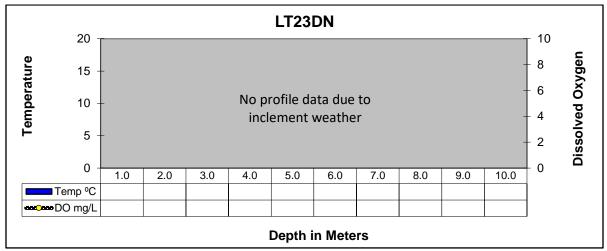



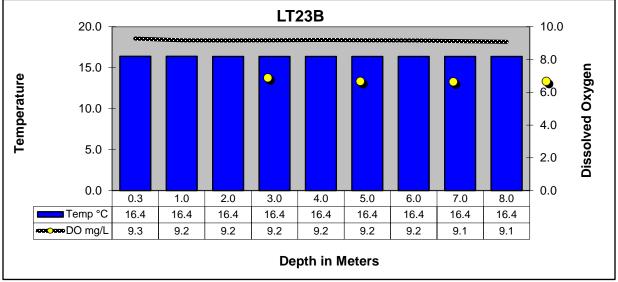

LAKE TAWAKONI AT SH276

