

SABINE RIVER AUTHORITY OF TEXAS

TO: INTERESTED PARTIES
FROM: ENVIRONMENTAL SERVICES DIVISION
RE: JULY 2024 MONTHLY WATER QUALITY REPORT

The Environmental Services Field Offices conducted water quality monitoring in the Sabine Basin from July 15th through the 23rd. The results of field monitoring are presented in this report¹ and additional data can be found using the Texas Commission on Environmental Quality (TCEQ) [Clean Rivers Program Data Tool](#).

Sabine Basin Tidal (Including Tributaries)

Weather – Air temperatures in the tidal basin were hot with highs in the high 80s to mid 90s. Low temperatures were in the mid 70s. The tidal stations received 1.18 inches of rainfall in the seven days prior to the sampling event.

Tidal Conditions – Surface salinity values were not greater than 1 ppt at any of the seven tidal stations. The highest salinity value of 0.6 ppt was recorded at station 15654 (BB1) at a depth of 0.3 meters.

Lower Sabine Basin (Toledo Bend Reservoir and the Sabine River downstream to Tidal)

Weather – Air temperatures in the lower basin were hot with highs in the upper 80s to mid 90s. Low temperatures were in the low to mid 70s. Toledo Bend received 1.92 inches of rainfall during the seven days prior to the sampling event.

Lake Level - The level of Toledo Bend was 170.62 feet with a daily average discharge of 13,639 cfs on the day of sampling. Toledo Bend has a conservation pool level of 172 feet msl. Reservoir profiles indicate a stratified water column.

Upper Sabine Basin (Lake Tawakoni, Lake Fork Reservoir, and the Sabine River upstream of Toledo Bend)

Weather - Air temperatures in the upper basin were hot with highs in the mid 70s to mid 90s. Low temperatures were in the low 50s to upper 70s. Lake Fork and Lake Tawakoni received 2.08 and 1.12 inches of rain respectively during the seven days prior to sampling.

Lake Level - The level of Lake Tawakoni was 437.39 feet msl with a release of 6 cfs on the day of sampling. The level of Lake Fork was 402.95 feet msl with a 20 cfs release on the day of sampling. Lake Tawakoni and Lake Fork have conservation pool levels of 437.5 feet msl and 403 feet msl, respectively. Reservoir profiles at Lake Fork and Lake Tawakoni indicated a stratified water column as depths increased.

This report and additional links to data for these monitoring stations are available at the [Sabine River Authority of Texas website](#). If you have any questions or comments concerning this report, please contact:

- Jerry Wiegreffe, Environmental Services Assistant Division Manager
409-746-3284 (jwiegreffe@sratx.org)
- *Lower and Tidal Sabine Basin*
Kaleb McDade, Lower Basin Biologist
409-746-3284 (kmcgabe@sratx.org)
- *Upper Sabine Basin*
Jubentino Guajardo, Upper Basin Biologist
903-878-7734 (jguajardo@sratx.org)

¹ Data in this report is considered preliminary until it is available in TCEQ's Surface Water Quality Monitoring Information System database.

SABINE RIVER AUTHORITY OF TEXAS
Monthly Water Quality Report


Table of Contents

Fixed Monitoring Stations	4
Segment 0501 – Sabine River Tidal.....	5
Segment 0502 - Sabine River Above Tidal.....	7
Segment 0503 - Sabine River Above Caney Creek	8
Segment 0504 – Toledo Bend Reservoir.....	9
Segment 0505 - Sabine River Above Toledo Bend Reservoir	14
Segment 0506 - Sabine River Below Lake Tawakoni	15
Segment 0507 - Lake Tawakoni	19

Table of Figures

Sabine Basin Map	3
Segment 0501	6
Segment 0502	7
Segment 0503	8
Toledo Bend Reservoir Profiles	12
Segment 0504.....	13
Segment 0505.....	14
Lake Fork Reservoir Profiles.....	17
Segment 0506.....	18
Lake Tawakoni Reservoir Profiles	20
Segment 0507	21

Sabine Basin Map

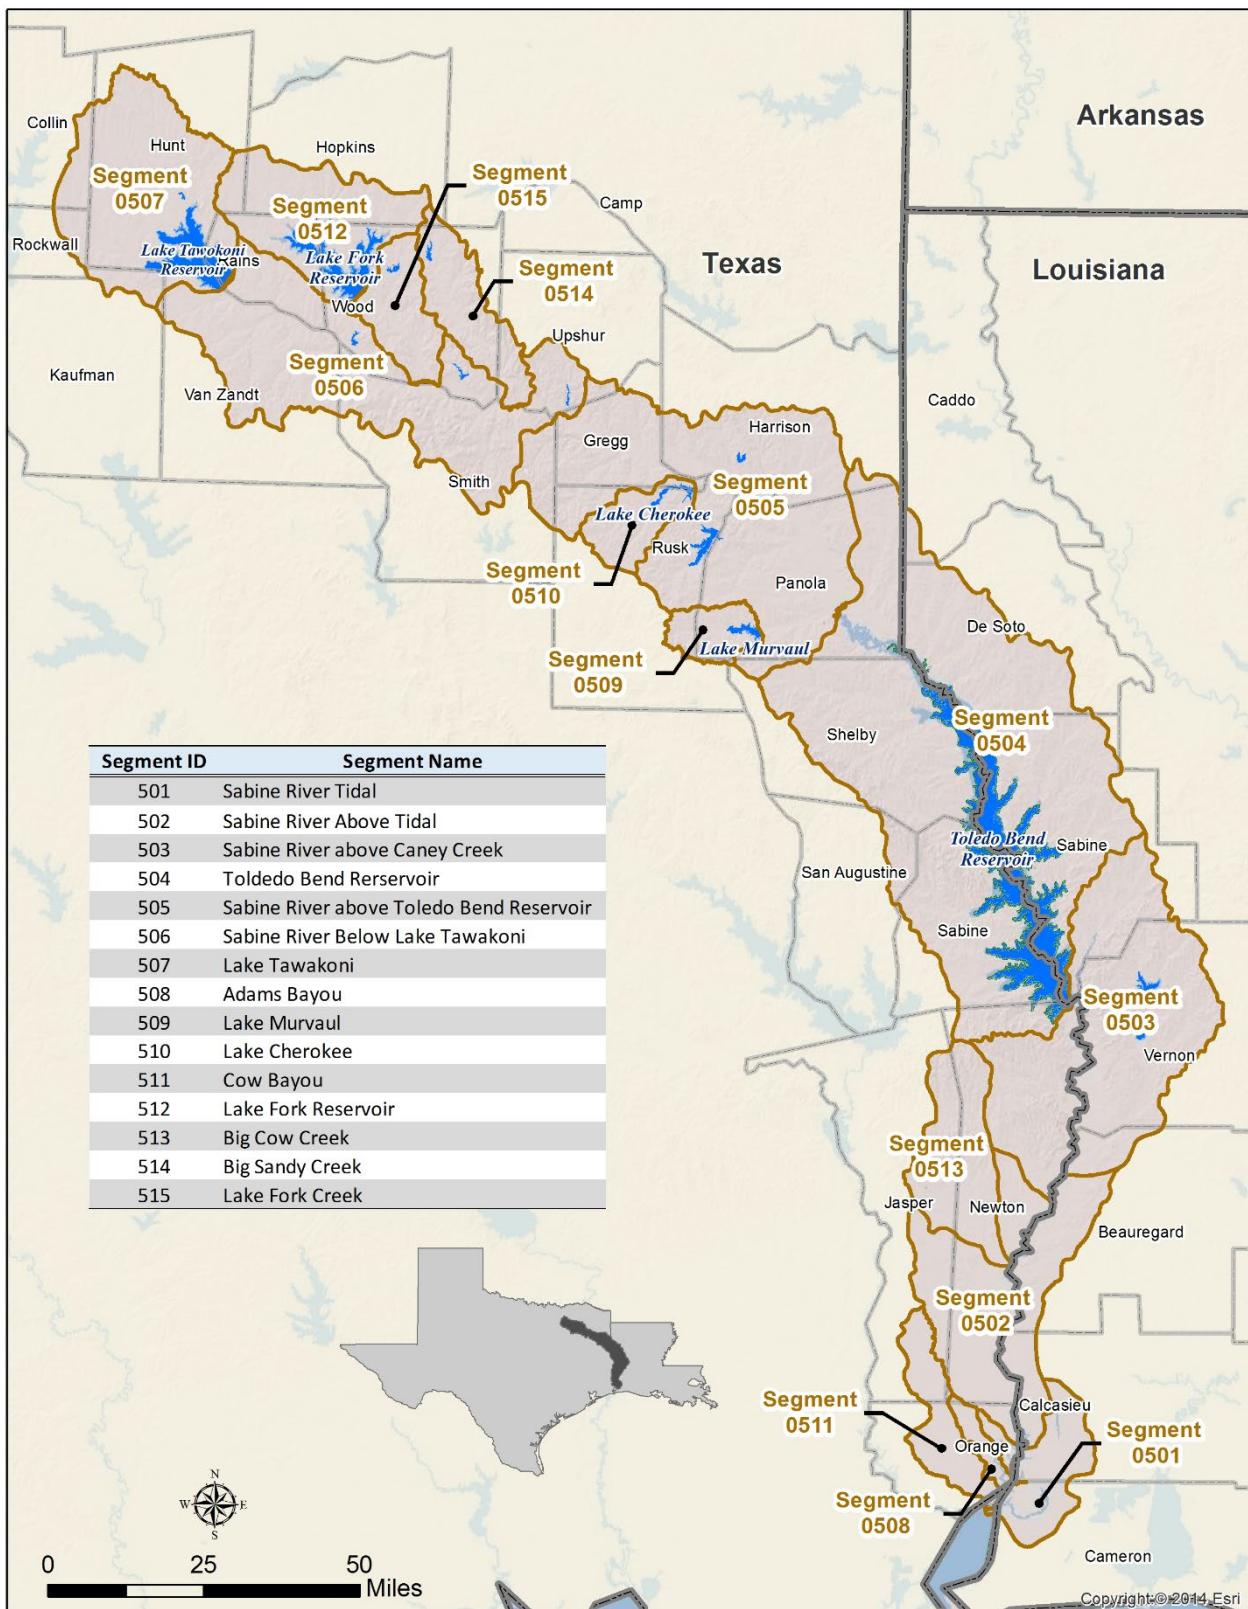

Current Fixed Monitoring Stations

Segment	Station TCEQ ID (SRA-TX ID)	Location
501	10391 (SRT1)	SABINE RIVER AT CHANNEL CAN 3
501	15654 (BB1)	BLACK BAYOU IN CAMERON PARISH
511	10449 (CB1)	COW BAYOU AT ROUND BUNCH ROAD
508	10441 (AB2)	ADAMS BAYOU AT FM 1006
501	15653 (ICW1)	INTERCOASTAL WATERWAY AT PERRY RIDGE
501	10394 (SRT2)	SABINE RIVER AT IH 10
501	10395 (SR1)	SABINE RIVER 12.00 KM UPSTREAM OF IH 10
502	10397 (SR2)	SABINE RIVER AT SH 12 NORTH OF DEWEYVILLE TX.
513	10465 (BCC1)	BIG COW CREEK AT FM 1416 SOUTH OF BON WIER
503	10398 (SR3)	SABINE RIVER AT US 190 EAST OF BON WIER TX.
503	10340 (BA4)	ANACOCO BAYOU AT LOUISIANA HWY 111 CROSSING SOUTHWEST OF KNIGHT LA.
503	10399 (SR5)	SABINE RIVER AT SH 63 EAST OF BURKEVILLE TX.
503	10401 (TB6S)	SABINE RIVER BELOW TOLEDO BEND RESERVOIR AT RIGHT ABUTMENT OF SPILLWAY FOR DAM
503	15660 (BT1)	BAYOU TORO AT LA SH 392 IN SABINE PARISH SW OF HORNBECK LA.
504	10404 (TB6A)	TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL
504	10406 (TB6C)	TOLEDO BEND RESERVOIR IN SIX MILE BOAT LANE 0.8KM EAST OF SH 87
504	18054 (TB6Q)	TOLEDO BEND RESERVOIR IN NEGREET BAYOU
504	10411 (TB6F)	TOLEDO BEND RESERVOIR IN SUNSHINE BAY NEAR FM 3121 BRIDGE
504	10402 (TB6H)	TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM
504	15659 (TB6K)	TOLEDO BEND RESERVOIR IN LANANA BAYOU AT LOUISIANA SH 191 IN SABINE PARISH LOUISIANA WEST OF MANY
504	15655 (TB6J)	TOLEDO BEND RESERVOIR PATROON BAYOU BRANCH AT FM 276
504	18053 (TB6LN)	TOLEDO BEND RESERVOIR SAN MIGUEL ARM BOAT LANE
504	18052 (TB6R)	TOLEDO BEND RESERVOIR AT RAGTOWN
505	10415 (SR10)	SABINE RIVER AT FM 2517
505	13628 (SR11)	SABINE RIVER AT US 59
505	10427 (SR16)	SABINE RIVER AT SH 42
505	10423 (SR14)	SABINE RIVER AT SH 149 SOUTH OF LONGVIEW TX
506	10428 (SR17)	SABINE RIVER AT US 271
506	10429 (SR19)	SABINE RIVER AT SH 14 S. OF HAWKINS
506	10430 (SR21)	SABINE RIVER AT US 69
514	10468 (BS1)	BIG SANDY CREEK AT SH 155
515	10469 (LF20)	LAKE FORK CREEK AT US 80
512	10458 (LF2)	LAKE FORK RESERVOIR NEAR DAM IN CREEK CHANNEL
512	10462 (LF4)	LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM 515
512	10461 (LF3)	LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM 515
507	10434 (LT23A)	LAKE TAWAKONI IN THE MAIN LAKE NEAR THE DAM
507	21173 (LT23DN)	LAKE TAWAKONI IN WACO BAY EQUIDISTANT FROM FINGER AND SPRING POINTS 1.17KM BEARING 18.61 DEGREES FROM IRON BRIDGE PUMPING STATION
507	10437 (LT23B)	LAKE TAWAKONI AT SH 276

Segment 0501 – Sabine River Tidal

Description: The designated segment includes the Sabine River from the confluence with Sabine Lake in Orange County to Morgans Bluff in Orange County. Although some areas are quite rural, this part of the Sabine Basin has two cities with populations greater than 5,000 and a variety of industries.


Segment 0508 – Adams Bayou Tidal. The segment reaches from the confluence with the Sabine River in Orange County to a point 1.1 kilometers (0.7 miles) upstream of IH-10 in Orange County.

Segment 0511 – Cow Bayou Tidal. The segment reaches from the confluence with the Sabine River in Orange County to a point 4.8 kilometers (3.0 miles) upstream of IH-10 in Orange County.

Segment 0501 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond μS/cm	TDS mg/L	Salinity ppt	Secchi meters	Turbidity NTU	Enterococcus mpn/ 100mL
7/23/24 09:13	10391 (SRT1)	0.3	28.9	6.9	5.0	65	113	72	<0.1	0.49	17.8	31
		3.0	28.9	6.7	5.0	65	113	72	<0.1			
		6.0	28.9	6.7	5.0	65	113	72	<0.1			
		9.0	28.8	6.7	4.9	63	113	72	<0.1			
7/23/24 08:56	15654 (BB1)	0.3	28.7	7.1	5.0	65	1,170	749	0.6	0.41	22.2	41
		2.0	28.7	7.0	5.0	65	1,170	749	0.6			
		4.0	28.7	7.0	5.0	64	1,150	729	0.6			
Segment 0511												
7/23/24 08:37	10449 (CB1)	0.3	29.3	6.2	2.8	37	220	142	0.1	0.34	25.4	341
		2.0	29.1	6.2	2.8	36	238	153	0.1			
		4.0	29.0	6.2	2.7	35	238	153	0.1			
Segment 0508												
7/23/24 09:41	10441 (AB2)	0.3	29.5	6.7	2.4	31	251	161	0.1	0.11	112	75
		2.0	29.0	6.6	2.2	29	254	163	0.1			
		4.0	29.4	6.6	1.5	20	271	174	0.1			
7/23/24 10:28	15653 (ICW1)	0.3	28.8	6.7	5.3	70	110	70	<0.1	0.43	17.2	73
		3.0	28.8	6.6	5.3	69	113	72	<0.1			
		6.0	28.9	6.6	5.3	69	115	74	<0.1			
7/23/24 11:09	10394 (SRT2)	0.3	28.5	6.6	4.8	62	93	60	<0.1	0.44	18.4	359
		4.0	28.5	6.6	4.8	62	93	60	<0.1			
		8.0	28.5	6.6	4.8	62	93	60	<0.1			
7/23/24 11:46	10395 (SR1)	0.3	28.7	6.6	5.1	66	93	59	<0.1	0.32	24.5	259

Segments 0501, 0508 & 0511

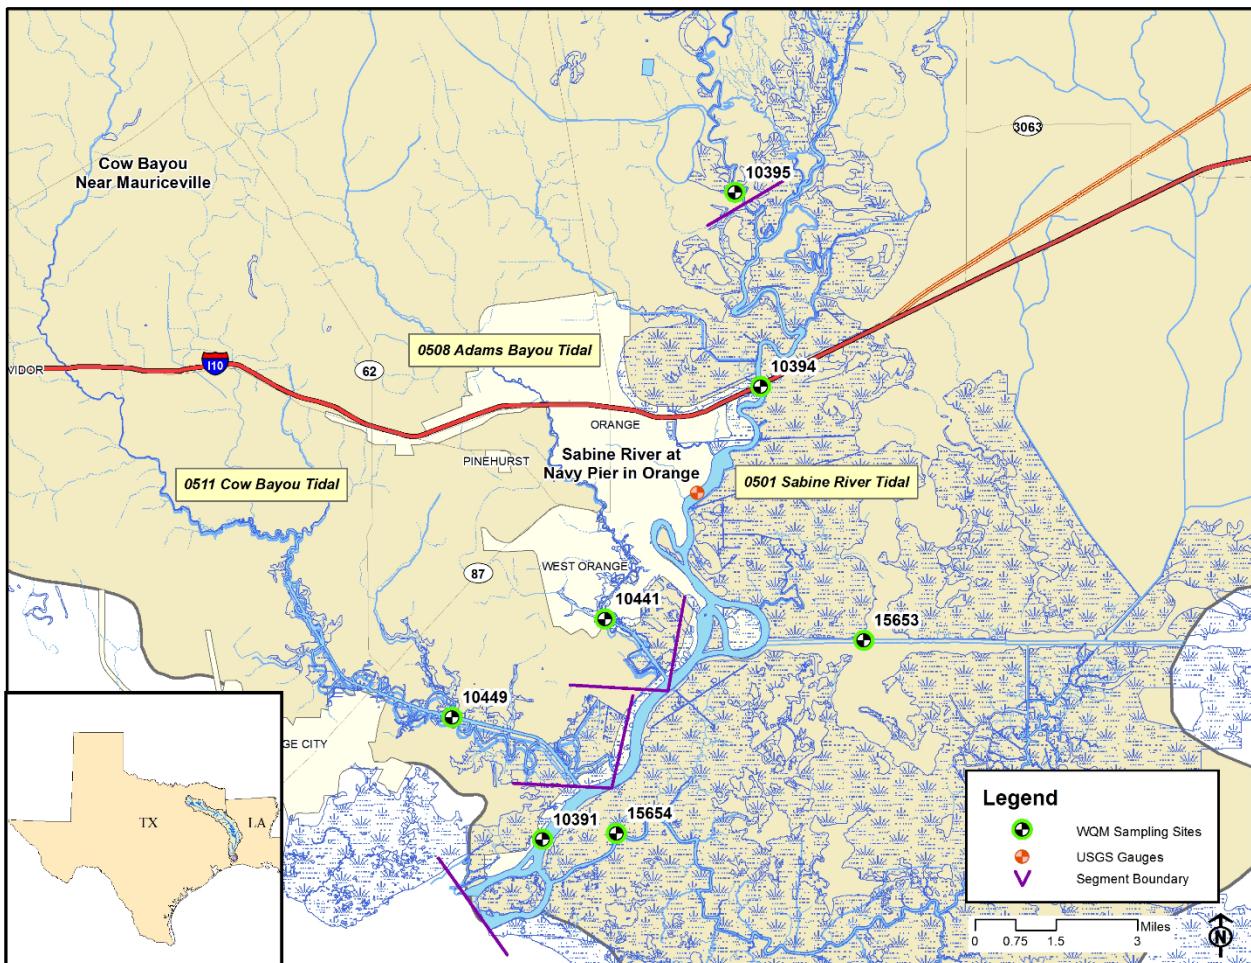

Segment 0502 - Sabine River Above Tidal

Description: The designated segment includes the Sabine River from Morgans Bluff in Orange County to the confluence with Caney Creek in Newton County. The largest tributary is Big Cow Creek (Segment 0513). This is largely a rural area with no major industries or cities.

Segment 0513 – Big Cow Creek. The segment reaches from the confluence with the Sabine River in Newton County to a point 4.6 kilometers (2.9 miles) upstream of CR 255 in Newton County.


Segment 0502 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
7/17/24 08:12	10397(SR2)	08030500	Sabine River near Ruliff, TX	14,900

Segments 0502 and 0513 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
7/17/24 08:12	10397 (SR2)	0.3	29.9	6.2	5.6	73	94	60	0.29	24.8	10
Segment 0513											
7/17/24 09:17	10465 (BCC1)	0.3	27.2	5.8	6.5	82	30	19	0.40	17.1	31

Segments 0502 & 0513

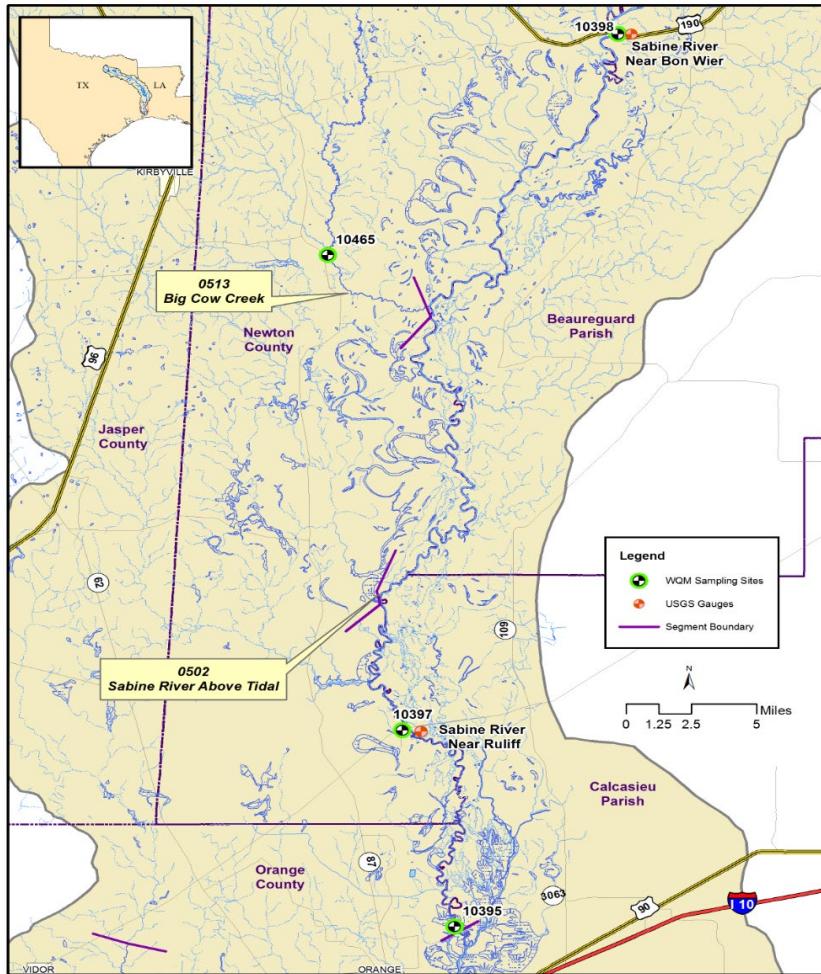

Segment 0503 - Sabine River Above Caney Creek

Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence with Caney Creek in Newton County up to Toledo Bend Dam in Newton County. This is largely a rural area, including one major city with a population greater than 5,000 and few industries. Two major tributaries that flow from Louisiana include Bayou Anacoco and Bayou Toro.


Segment 0503 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
7/17/24 11:38	10398(SR3)	08028500	Sabine River near Bon Wier, TX	15,000
7/17/24 10:24	10399(SR5)	08026000	Sabine River near Burkeville, TX	13,900

Segment 0503 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	E.coli mpn/100mL
7/17/24 11:38	10398 (SR3)	0.3	29.8	7.1	6.4	85	96	62	0.48	12.5	3
7/17/24 11:08	10340 (BA4)	0.3	30.6	7.3	5.4	72	650	420	0.47	10.3	19
7/17/24 10:24	10399 (SR5)	0.3	29.0	6.8	5.8	75	92	59	1.1	3.61	2
7/15/24 13:19	10401 (TB6S)	0.3	30.2	7.4	8.2	109	91	58	1.2	2.81	3
7/15/24 12:51	15660 (BT1)	0.3	28.4	6.8	7.5	96	63	41	0.36	23.5	31

Segment 0503

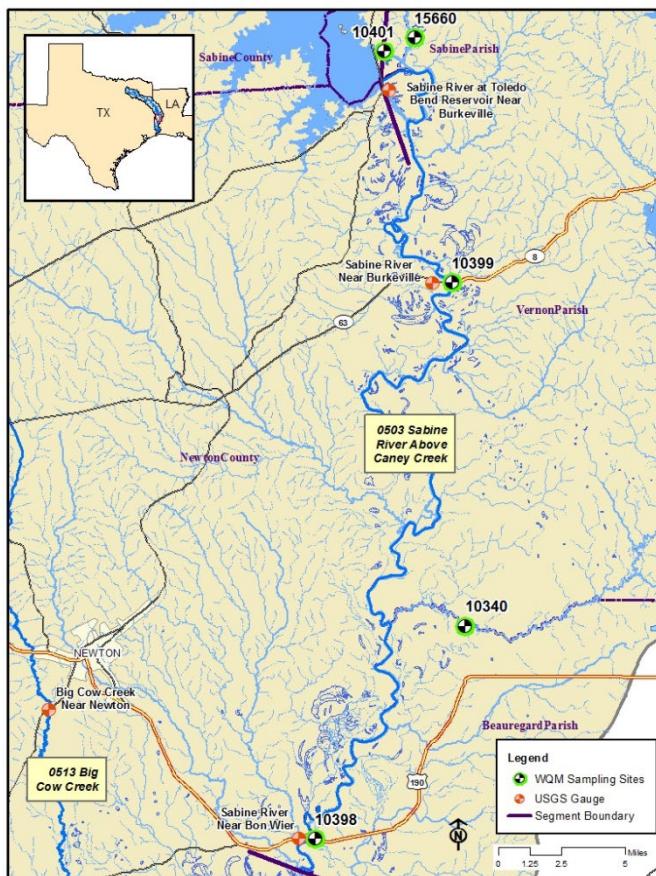

Segment 0504 – Toledo Bend Reservoir

Description: The designated segment includes the Sabine River from Toledo Bend Dam in Newton County to a point immediately upstream of the confluence of Murvaul Creek in Panola County. Although this area is largely rural, it includes two cities with populations greater than 5,000. Murvaul Creek is a major tributary that enters upstream of the reservoir.

Segment 0504 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	E.coli mpn/100mL
7/16/24 14:00	10404 (TB6A)	0.3	31.7	7.8	8.6	118	91	59	1.3	2.30	2
		1.0	30.9	7.6	8.3	112	91	58			
		2.0	30.4	7.6	8.4	111	92	58			
		3.0	30.0	7.2	8.1	112	92	58			
		4.0	29.3	6.6	5.9	80	91	58			
		5.0	28.0	6.4	2.7	35	91	58			
		8.0	27.4	6.4	2.1	27	91	58			
		11.0	25.5	6.4	<0.1	<1	97	62			
		14.0	22.3	6.4	<0.1	<1	112	72			
		17.0	20.1	6.5	<0.1	<1	123	78			
		20.0	19.9	6.5	<0.1	<1	128	82			
		23.0	18.0	6.6	<0.1	<1	135	86			
		26.0	17.3	6.7	<0.1	<1	142	91			
7/16/24 07:58	10406 (TB6C)	0.3	29.2	6.4	5.8	75	87	56	1.1	3.77	3
		1.0	29.2	6.4	5.8	75	87	56			
		2.0	29.2	6.3	5.5	71	87	56			
		3.0	28.8	6.0	0.6	8	88	57			
		4.0	28.6	5.9	0.1	1	91	58			
7/16/24 12:50	18054 (TB6Q)	0.3	32.0	8.0	8.7	119	89	57	0.92	4.07	<1
		1.0	31.7	8.1	9.0	122	89	57			
		2.0	30.7	7.9	8.2	107	87	56			
		3.0	30.4	7.7	7.9	105	88	56			
		4.0	30.3	7.5	7.4	99	89	57			
		5.0	30.2	7.4	7.0	94	89	57			
		6.0	30.1	7.2	6.9	91	89	57			
		7.0	30.0	7.0	5.3	70	91	58			
		8.0	28.7	6.7	0.3	3	95	61			
		9.0	28.4	6.5	<0.1	<1	96	62			


Segment 0504 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
7/15/24 10:47	10411 (TB6F)	0.3	31.2	7.8	9.0	121	82	52	0.56	5.74	11
		1.0	30.8	7.8	9.0	120	82	52			
		2.0	29.8	7.4	5.3	59	82	52			
		3.0	29.1	7.0	1.5	20	82	53			
		4.0	28.8	6.7	0.6	8	79	51			
		5.0	28.1	6.5	<0.1	<1	80	51			
7/16/24 10:42	10402 (TB6H)	0.3	29.8	6.6	5.5	73	85	54	1.1	3.52	1
		1.0	29.4	6.5	4.9	65	85	54			
		2.0	28.9	6.4	2.8	37	84	54			
		3.0	28.7	6.4	2.4	30	83	53			
		4.0	28.7	6.4	2.3	30	83	53			
		5.0	28.6	6.4	2.1	27	84	54			
		8.0	28.2	6.4	<0.1	<1	85	54			
		11.0	27.9	6.5	<0.1	<1	87	56			
		14.0	26.2	6.5	<0.1	<1	107	69			
		17.0	22.0	6.6	<0.1	<1	129	83			
		18.0	21.9	6.7	<0.1	<1	131	84			
7/15/24 11:20	15659 (TB6K)	0.3	31.6	8.2	9.5	129	83	53	0.55	4.28	<1
		1.0	31.5	8.3	9.4	127	83	53			
		2.0	31.3	8.2	9.2	123	83	53			
		3.0	30.8	8.0	7.8	105	84	54			
		4.0	30.0	7.6	6.3	81	86	55			
		5.0	29.1	7.1	2.3	30	87	56			
		6.0	28.4	6.8	0.2	3	90	57			
		7.0	28.1	6.6	<0.1	<1	95	61			
		8.0	27.9	6.6	<0.1	<1	97	62			
		9.0	27.8	6.5	<0.1	<1	97	62			
7/15/24 09:53	15655 (TB6J)	0.3	30.6	7.2	8.0	106	90	57	0.46	7.65	1
		1.0	30.5	7.1	7.9	104	89	57			
		2.0	30.3	7.1	7.4	98	88	56			
		3.0	30.2	6.9	5.1	67	90	57			
		4.0	29.1	6.6	0.2	2	96	62			


Segment 0504 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
7/16/24 11:53	18053 (TB6LN)	0.3	31.3	7.9	8.4	114	81	52	0.77	6.12	<1
		1.0	31.1	7.9	8.3	112	81	52			
		2.0	30.8	7.8	7.9	105	82	52			
		3.0	30.6	7.6	7.2	96	81	52			
		4.0	30.6	7.4	7.1	94	81	52			
		5.0	30.4	7.1	5.5	73	81	52			
		6.0	30.2	7.0	5.8	77	82	52			
7/16/24 09:25	18052 (TB6R)	0.3	29.5	6.8	4.7	61	125	80	0.73	7.63	<1
		1.0	29.5	6.9	4.7	61	125	80			
		2.0	29.5	6.9	4.6	60	125	80			
		3.0	29.4	6.8	4.5	59	125	80			
		4.0	29.4	6.8	4.5	59	125	80			
		5.0	29.4	6.8	4.4	58	125	80			
		6.0	29.4	6.8	4.4	57	125	80			
		7.0	29.4	6.8	4.3	57	125	80			
		8.0	29.4	6.7	4.4	57	125	80			
		9.0	29.4	6.6	4.2	55	124	80			
		10.0	28.8	6.4	0.7	9	117	72			
		11.0	28.7	6.4	0.3	4	112	71			
		12.0	28.6	6.4	<0.1	<1	110	70			
		13.0	28.6	6.4	<0.1	<1	110	70			


Toledo Bend Reservoir Profiles

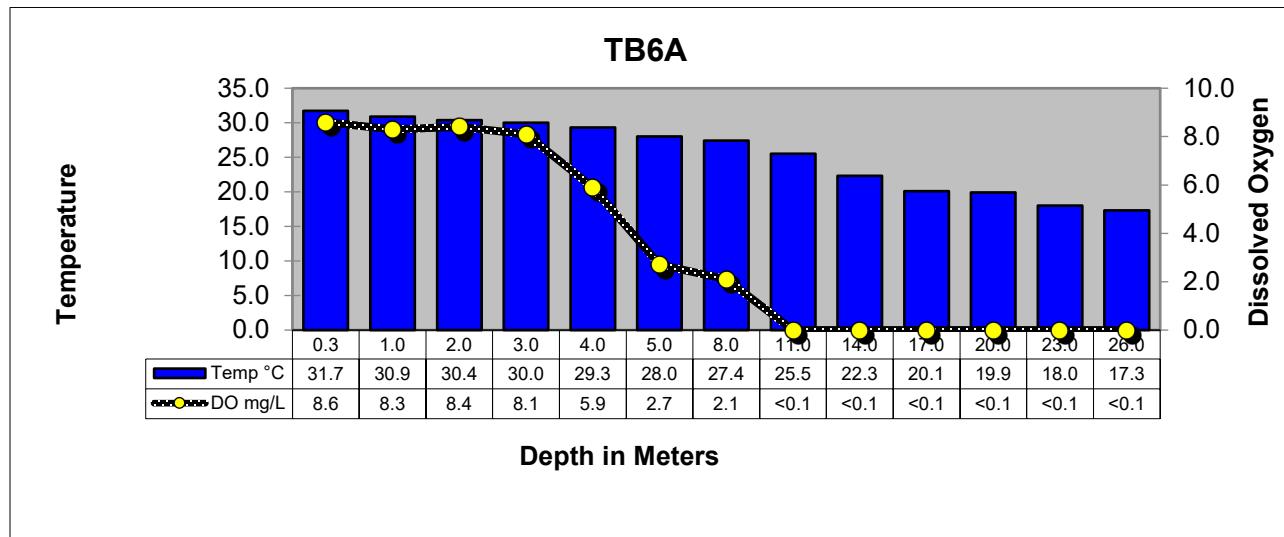

TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL

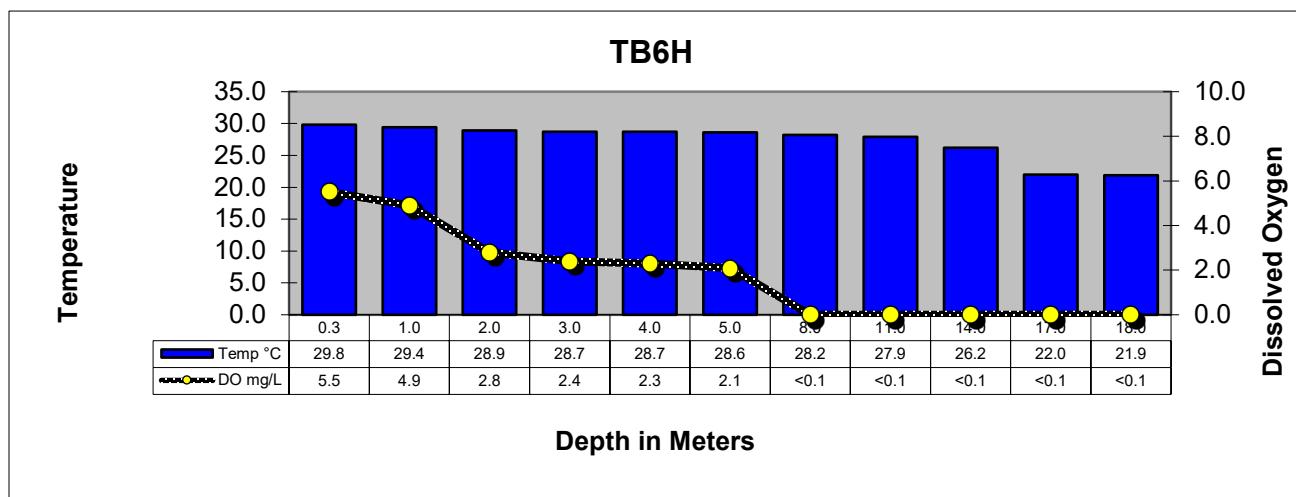


TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM

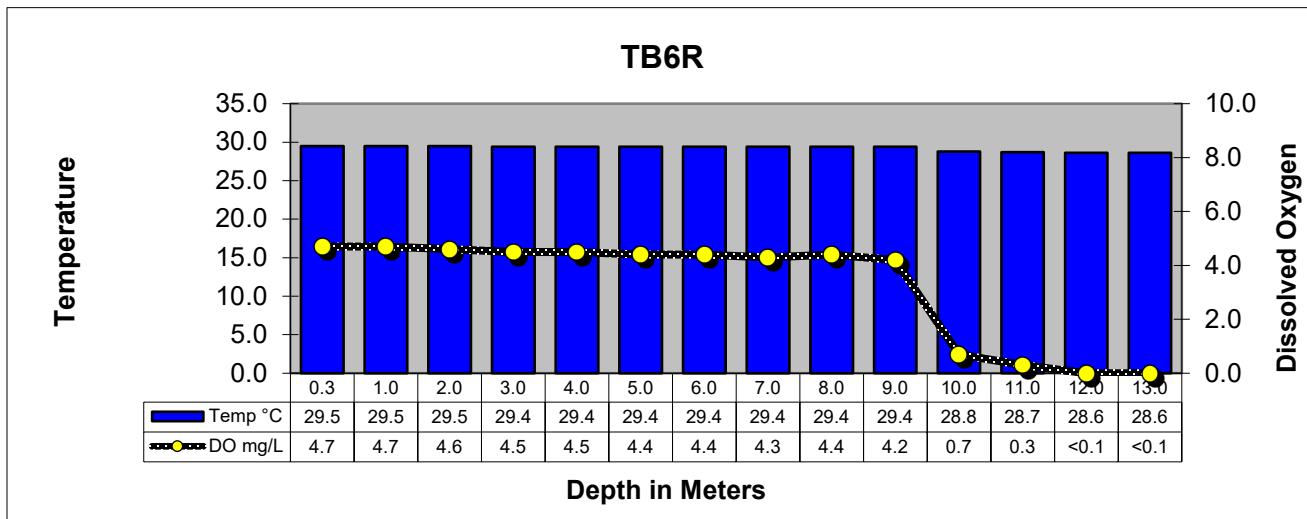

TOLEDO BEND RESERVOIR AT RAGTOWN

Segment 0504

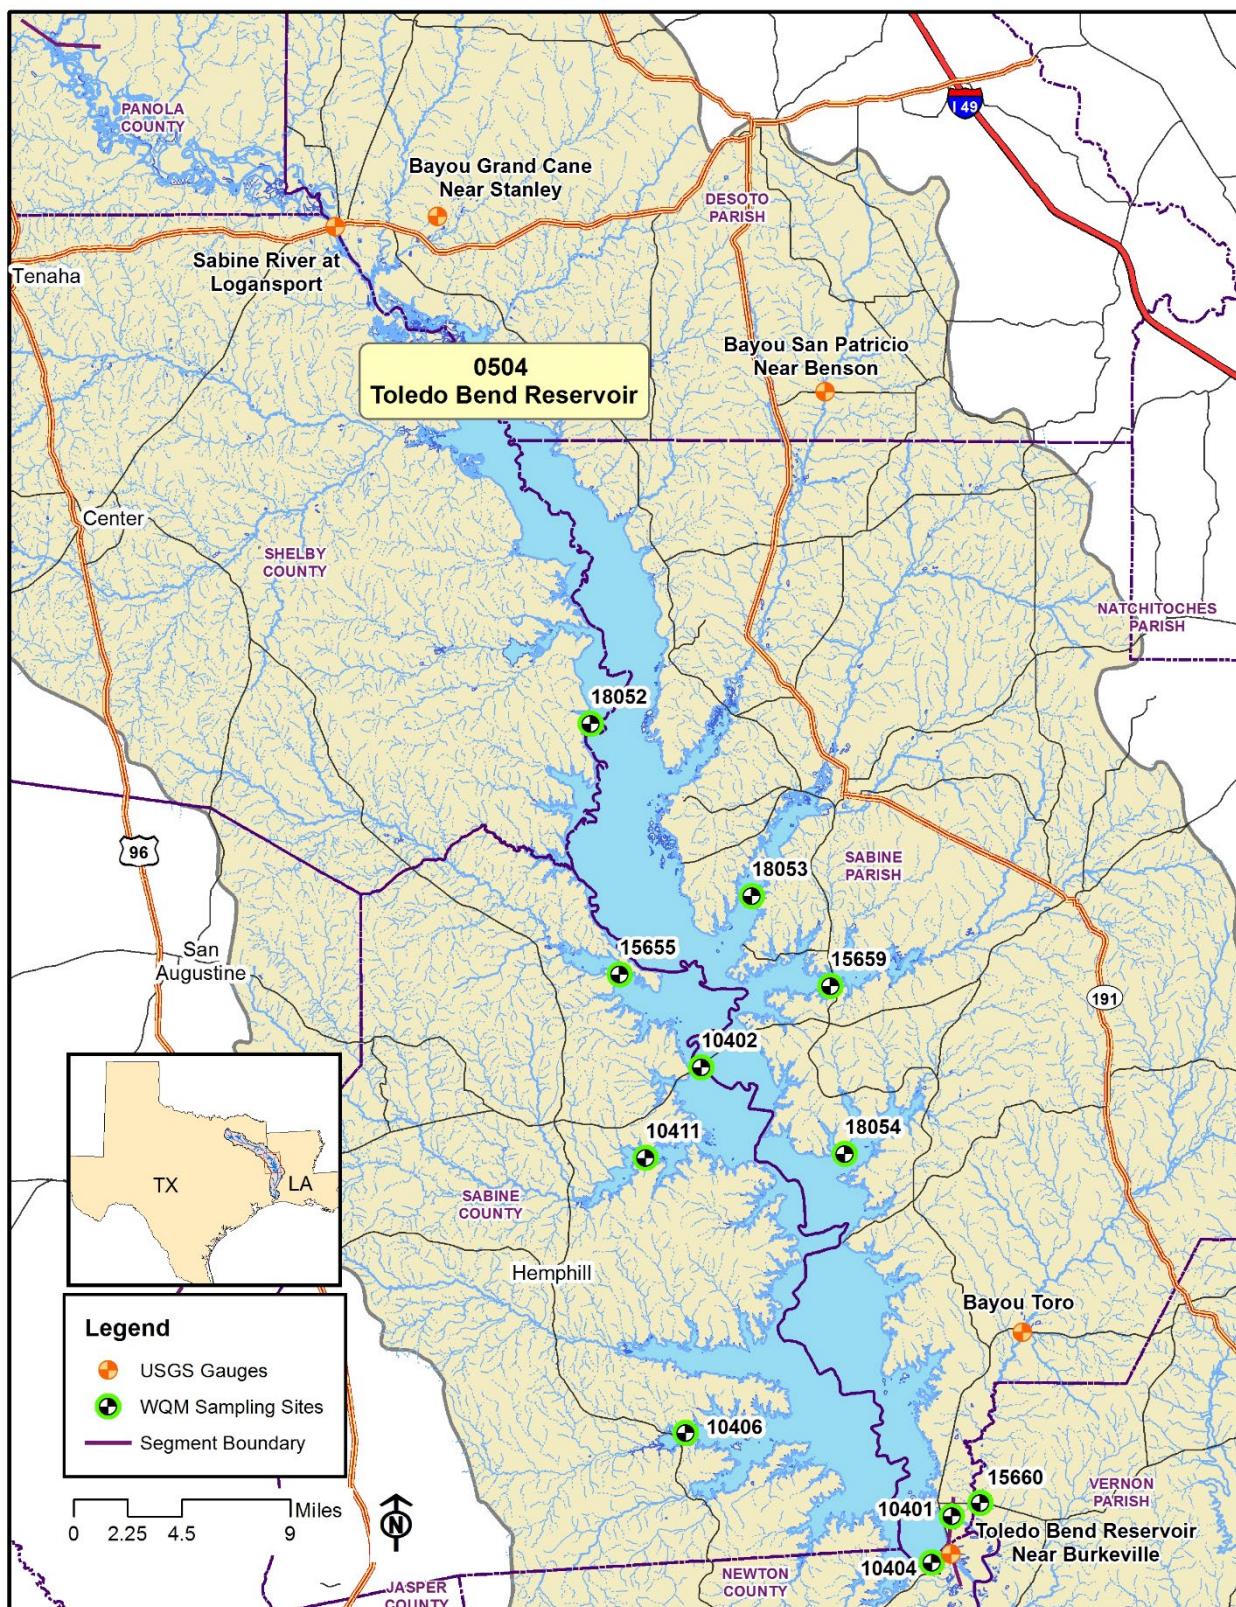

Segment 0505 - Sabine River Above Toledo Bend Reservoir

Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence of Murvaul Creek in Panola County to a point 100 meters (110 yards) downstream of US 271 in Gregg County. Segment 0505 is used extensively for water supply and contains the highest concentration of population in the Sabine Basin with eight cities having populations greater than 5,000. Segment 0505 includes a large section of the East Texas Oilfield as well as numerous industries.


Segment 0505 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
7/17/24 09:42	13628(SR11)	08022040	Sabine River near Beckville, TX	1,560
7/17/24 08:53	10423(SR14)	08020990	Sabine River near Longview, TX	1,010

Segment 0505 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond $\mu\text{S}/\text{cm}$	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
7/17/24 10:24	10415(SR10)	0.3	29.6	6.7	5.8	77	235	150	0.12	170	18
7/17/24 09:42	13628(SR11)	0.3	29.7	6.6	6.2	82	234	150	0.16	92.4	29
7/17/24 08:53	10423(SR14)	0.3	29.5	6.8	6.1	81	230	147	0.16	73.1	248
7/17/24 08:28	10427(SR16)	0.3	29.4	6.6	6.2	82	215	137	0.21	81.6	12

Segment 0505

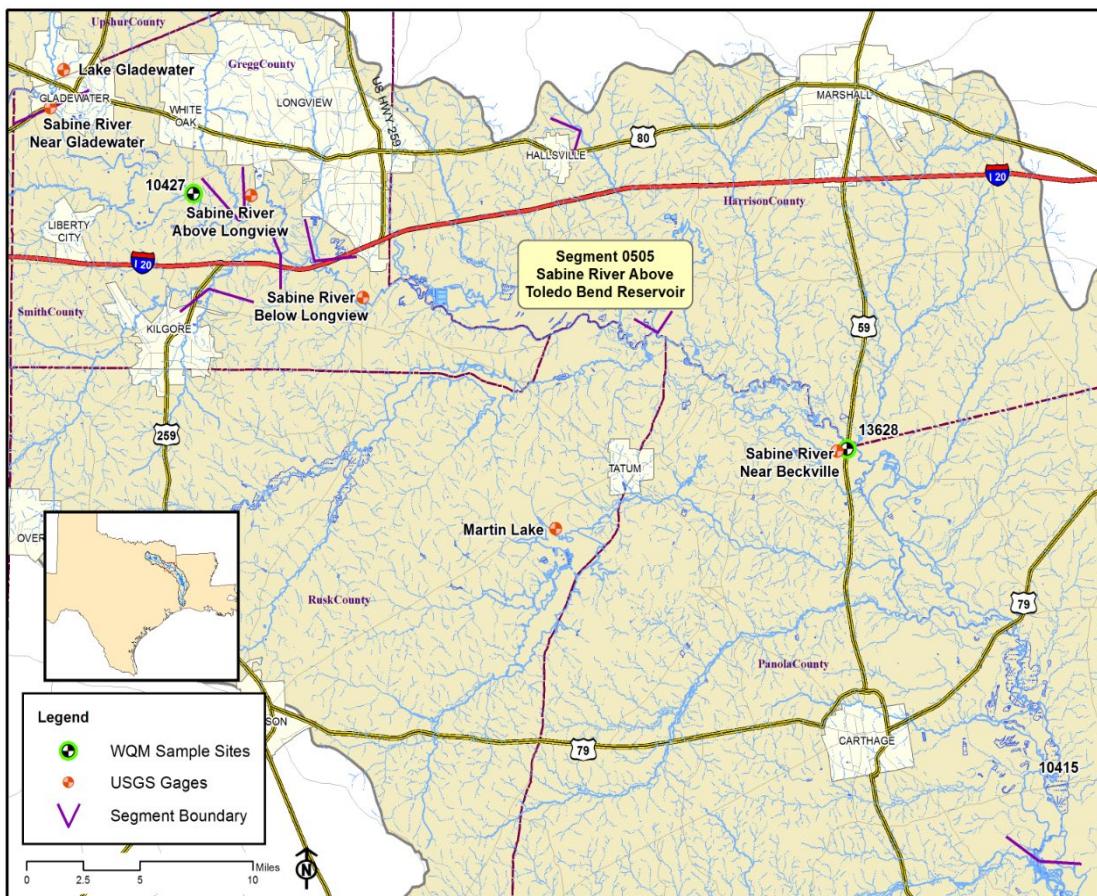

Segment 0506 - Sabine River Below Lake Tawakoni

Description: The designated segment includes the Sabine River from a point 100 meters (110 yards) downstream of US 271 in Gregg County to Iron Bridge Dam in Rains County. This is largely a rural area with no cities having a population greater than 5,000. Oilfield activities, rural housing developments, and agriculture are in the watershed. The major tributaries include:

Segment 0514 - Big Sandy Creek. The segment reaches from the confluence with the Sabine River in Upshur County to a point 2.6 kilometers (1.6 miles) upstream of SH 11 in Hopkins County.

Segment 0515 - Lake Fork Creek. The segment reaches from the confluence with the Sabine River in Wood County to Lake Fork Dam in Wood County.

Segment 0512 - Lake Fork Reservoir. The segment reaches from Lake Fork Dam in Wood County up to the normal pool elevation of 403 feet.

Segment 0506 USGS- Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
7/17/24 07:55	10428(SR17)	08020000	Sabine River near Gladewater, TX	540
7/16/24 15:02	10429(SR19)	08019200	Sabine River near Hawkins, TX	254
7/16/24 13:26	10430(SR21)	08018500	Sabine River near Mineola, TX	60
Segment 0514				
7/16/24 15:25	10468(BS1)	08019500	Big Sandy Creek near Big Sandy, TX	51


Segment 0506 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
7/17/24 07:55	10428(SR17)	0.3	29.4	6.3	6.2	83	214	137	0.20	78.2	23
7/16/24 15:02	10429(SR19)	0.3	30.9	7.2	7.2	98	230	147	0.20	54.9	13
7/16/24 13:26	10430(SR21)	0.3	29.4	7.1	4.9	64	360	231	0.14	63.3	26
Segment 0514											
7/16/24 15:25	10468(BS1)	0.3	28.9	6.7	6.0	79	141	90	0.87	19.2	93
Segment 0515											
7/16/24 14:41	10469(LF20)	0.3	30.0	7.0	6.1	82	195	125	0.25	37.4	29


Segment 0506 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	E. coli mpn/100mL
Segment 0512											
7/16/24 12:33	10458(LF2)	0.3	29.1	7.8	7.5	99	158	101	0.99	4.54	<1
		1.0	29.1	7.8	7.5	99	158	101			
		2.0	29.0	7.8	7.5	99	158	101			
		3.0	28.7	7.6	6.4	83	158	101			
		4.0	28.5	7.4	4.8	62	158	101			
		5.0	28.0	7.1	0.9	11	158	101			
		6.0	27.3	6.9	0.5	6	158	101			
		7.0	27.0	6.8	0.1	2	158	101			
		8.0	26.6	6.7	0.1	2	158	101			
		9.0	25.8	6.7	0.1	2	163	104			
		10.0	24.2	6.7	0.1	2	171	110			
		11.0	23.4	6.7	0.1	2	172	110			
		12.0	22.1	6.6	0.2	2	176	113			
		13.0	21.2	6.6	0.2	2	180	115			
		14.0	20.7	6.7	0.2	2	184	118			
		15.0	19.5	6.7	0.2	2	190	122			
		16.0	19.1	6.7	0.2	2	200	129			
7/16/24 11:26	10462(LF4)	0.3	30.3	8.8	8.8	114	157	101	0.59	6.31	2
		1.0	30.3	8.8	8.5	114	157	101			
		2.0	30.3	8.8	8.5	114	157	101			
		3.0	30.2	8.6	8.0	103	157	100			
		4.0	30.1	8.3	7.0	94	157	100			
		5.0	30.0	8.2	7.0	94	157	100			
		6.0	30.0	8.1	6.8	91	157	100			
		7.0	29.3	7.3	0.5	7	158	101			
		8.0	27.5	7.1	0.2	2	165	106			
		9.0	25.1	6.9	0.1	2	173	110			
		10.0	24.6	6.8	0.1	2	177	114			
		11.0	23.3	6.8	0.1	2	191	122			
7/16/24 11:49	10461(LF3)	0.3	30.1	8.1	7.6	102	159	102	0.52	7.25	4
		1.0	30.1	8.1	7.6	103	159	102			
		2.0	30.1	8.1	7.6	102	159	102			
		3.0	30.1	8.1	7.5	101	159	102			
		4.0	30.1	8.0	7.4	99	159	102			
		5.0	30.0	8.0	7.4	99	159	102			
		6.0	30.0	7.9	7.2	97	159	102			
		7.0	30.0	7.8	6.8	92	159	102			
		8.0	28.8	7.3	0.4	5	170	109			
		9.0	27.9	7.0	0.2	2	188	121			


Lake Fork Reservoir Profiles

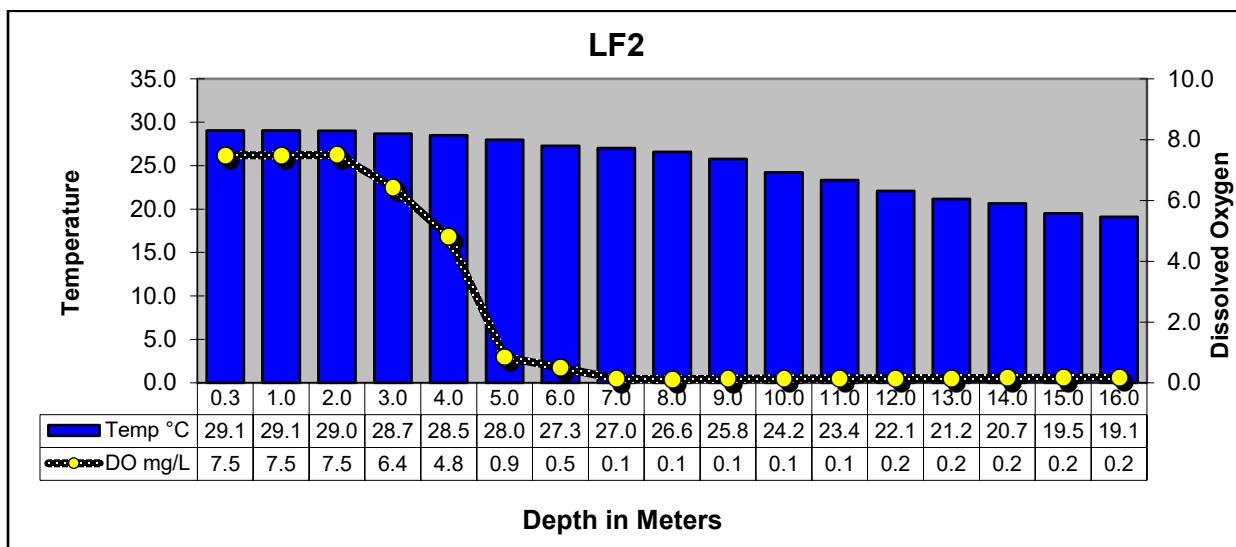

LAKE FORK RESERVOIR NEAR DAM IN CREEK CHANNEL

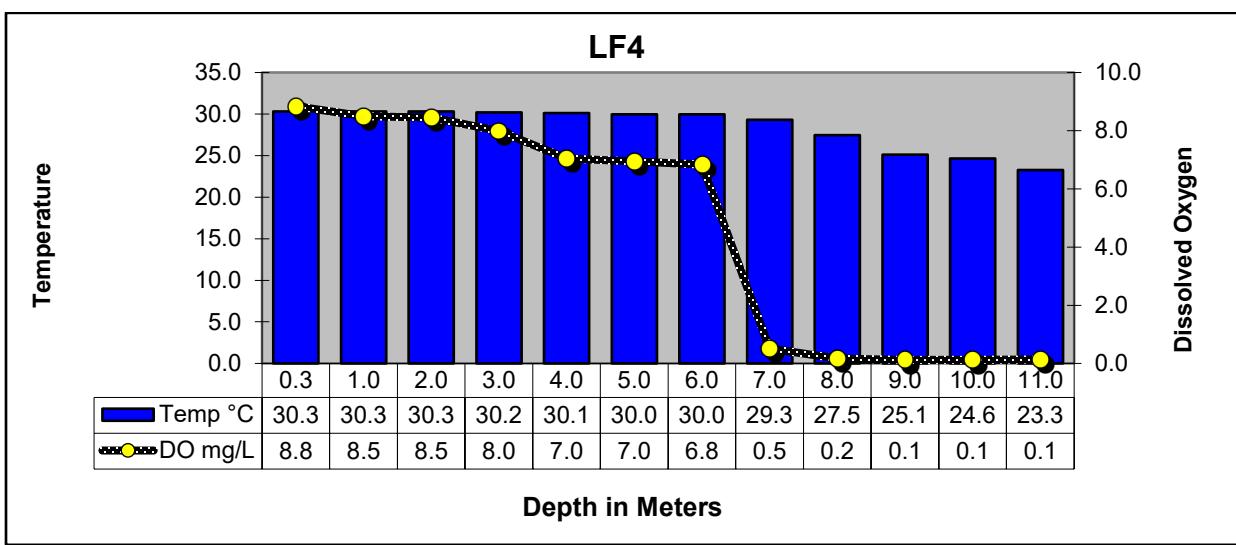


LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM515

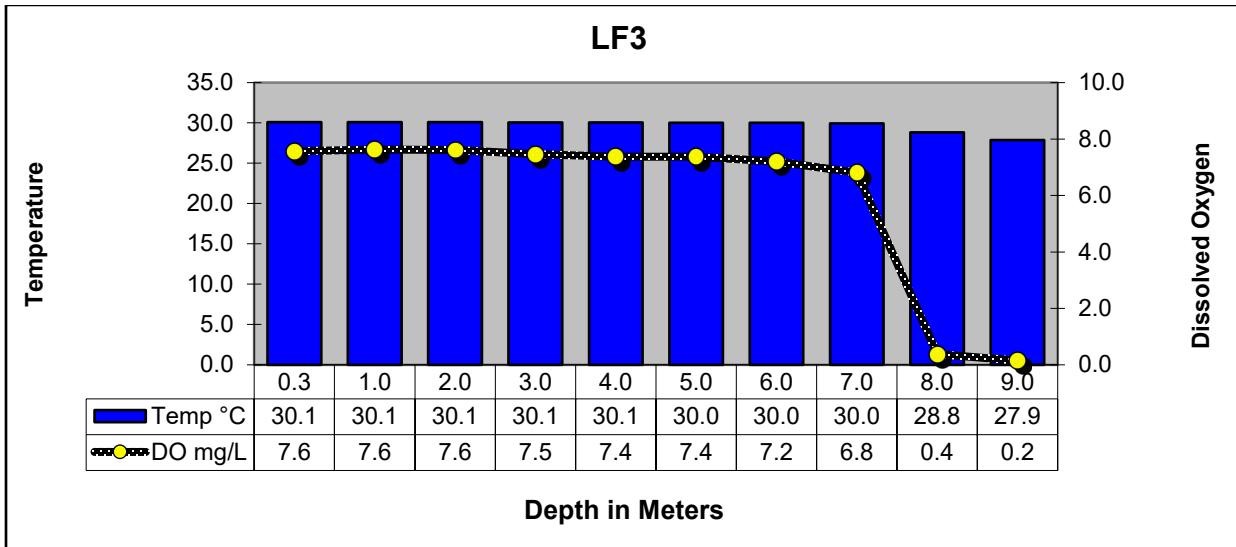

LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM515

Segments 0506, 0512, 0514 & 0515

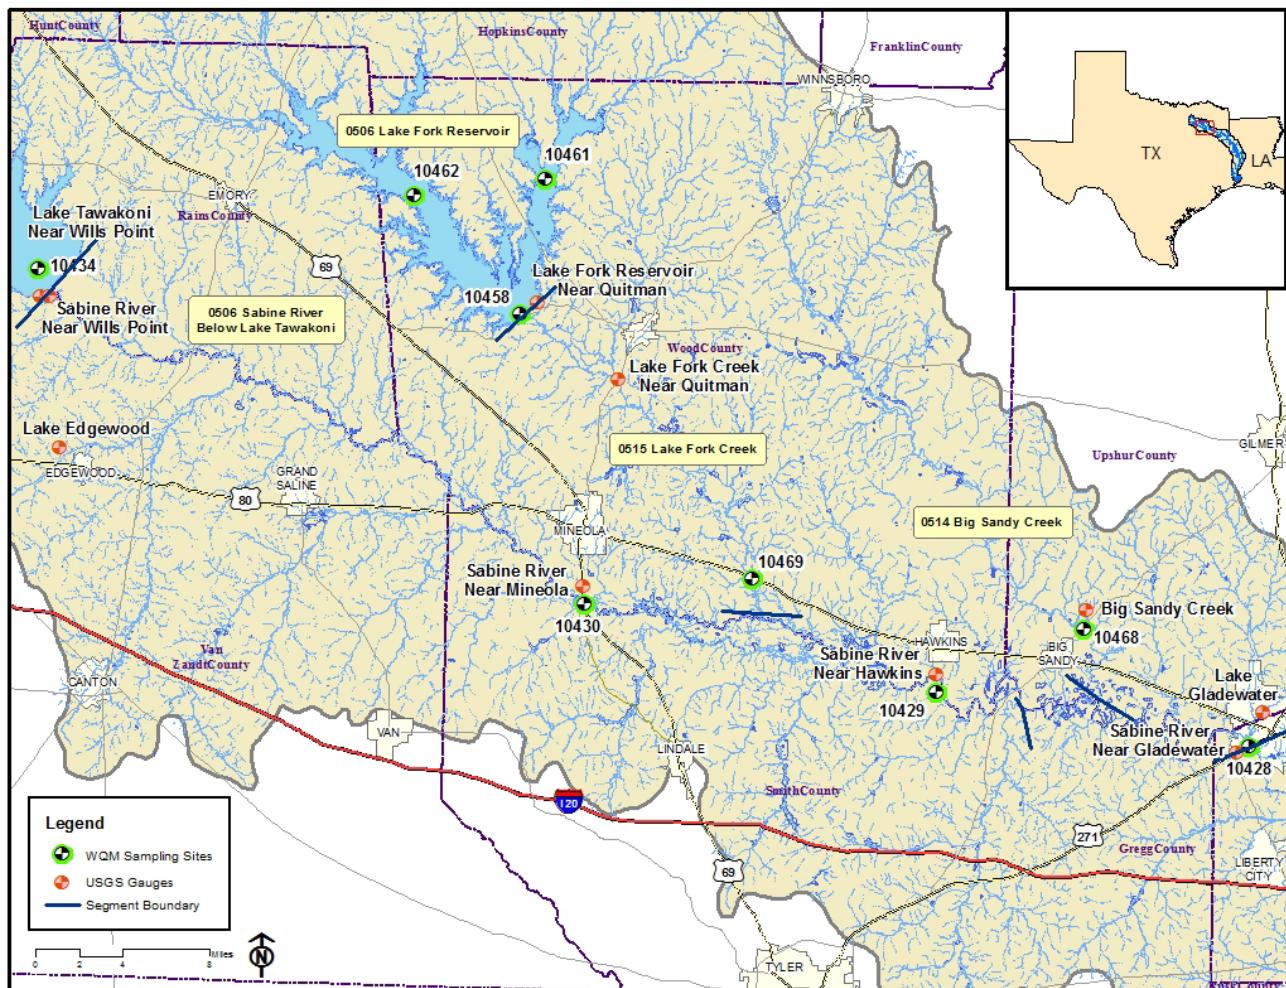


Segment 0507 - Lake Tawakoni

Description: The designated segment includes the impounded Sabine River from Iron Bridge Dam in Rains County up to the normal pool elevation of 437.5 feet. Although much of this segment is rural, it contains two cities with populations greater than 5,000 and one of the four largest cities in the Sabine Basin.


Segment 0507 Water Quality

Date and Time	Station	Depth meter s	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	E. coli mpn/100mL
7/16/24 10:28	10434(LT23A)	0.3	28.9	8.6	7.8	103	202	129	0.89	5.23	<1
		1.0	28.9	8.6	7.8	103	202	129			
		2.0	28.9	8.5	7.7	102	202	129			
		3.0	28.9	8.5	7.6	100	202	129			
		4.0	28.8	8.5	7.5	98	202	129			
		5.0	28.8	8.4	7.0	92	203	130			
		6.0	28.5	8.2	6.1	81	204	131			
		7.0	27.9	7.6	1.9	24	204	131			
		8.0	27.3	7.3	0.2	2	204	131			
		9.0	26.9	7.2	0.1	2	206	132			
		10.0	25.5	7.1	0.1	2	210	134			
		11.0	25.2	7.0	0.1	2	211	135			
		12.0	24.3	6.9	0.1	2	215	138			
		13.0	24.1	6.9	0.1	2	219	140			
		14.0	23.6	6.8	0.1	2	221	142			
		15.0	23.2	6.7	0.1	2	243	156			
7/16/24 09:34	21173(LT23DN)	0.3	29.3	8.6	6.6	88	202	129	0.78	6.82	<1
		1.0	29.3	8.6	6.6	87	202	129			
		2.0	29.3	8.5	6.5	87	202	129			
		3.0	29.2	8.4	6.3	84	203	130			
		4.0	29.0	8.3	5.9	77	203	130			
		5.0	28.9	8.2	5.8	76	204	131			
		6.0	28.9	8.2	5.7	75	203	130			
		7.0	28.6	7.6	1.4	17	207	132			
		8.0	28.5	7.4	0.5	5	207	133			
		9.0	27.4	7.1	0.1	1	213	137			
		10.0	26.0	6.8	0.1	1	227	146			
7/16/24 09:11	10437(LT23B)	0.3	30.1	8.7	7.2	97	201	129	0.72	11.4	2
		1.0	30.1	8.7	7.2	97	201	129			
		2.0	30.1	8.7	7.1	95	202	129			
		3.0	30.1	8.6	7.1	95	202	129			
		4.0	30.1	8.6	7.1	95	202	129			
		5.0	30.0	8.6	7.0	94	202	129			
		6.0	30.0	8.6	7.0	94	202	129			
		7.0	29.9	8.6	6.9	92	202	129			
		8.0	29.9	8.5	6.8	91	203	130			
		9.0	29.8	8.4	6.3	85	203	130			


Lake Tawakoni Reservoir Profiles

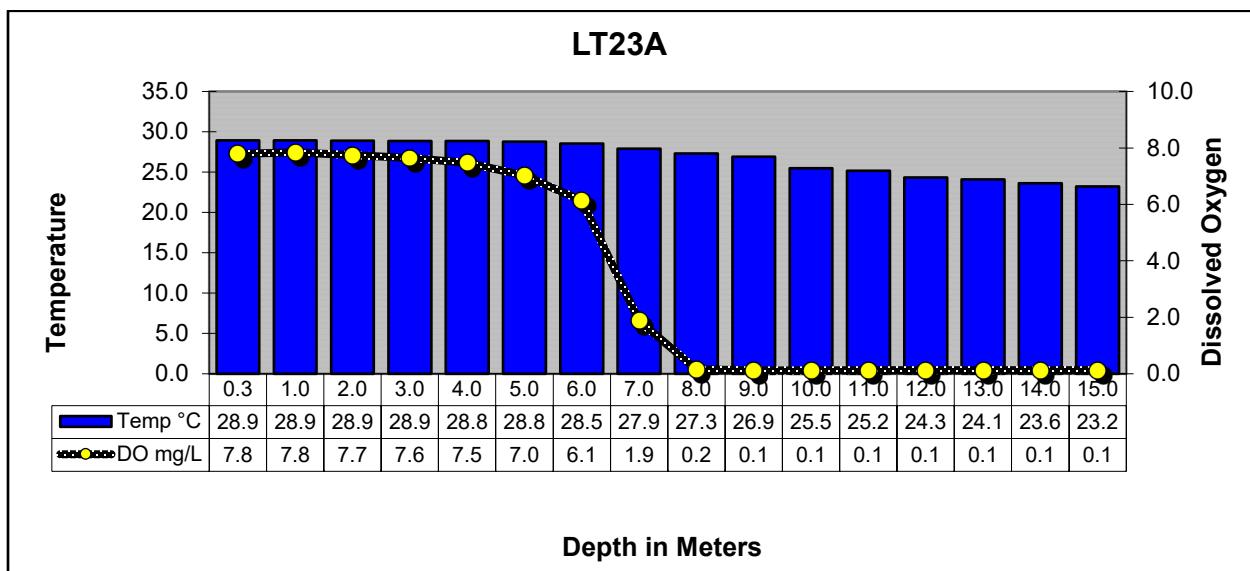

LAKE TAWAKONI IN THE MAIN LAKE NEAR THE DAM

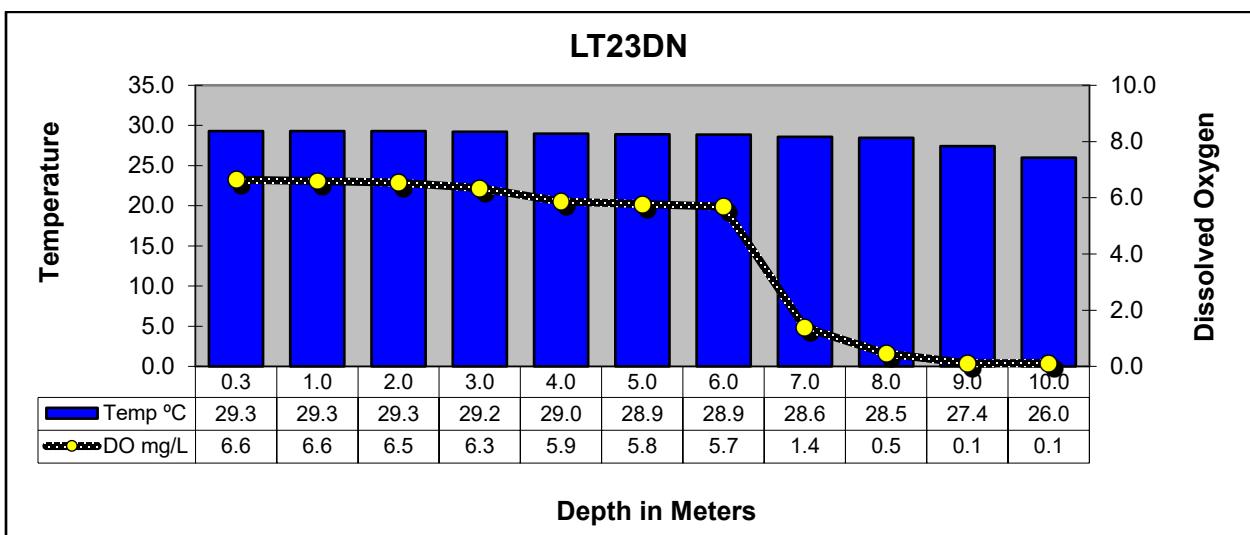

LAKE TAWAKONI IN WACO BAY EQUIDISTANT FROM FINGER AND SPRING POINTS

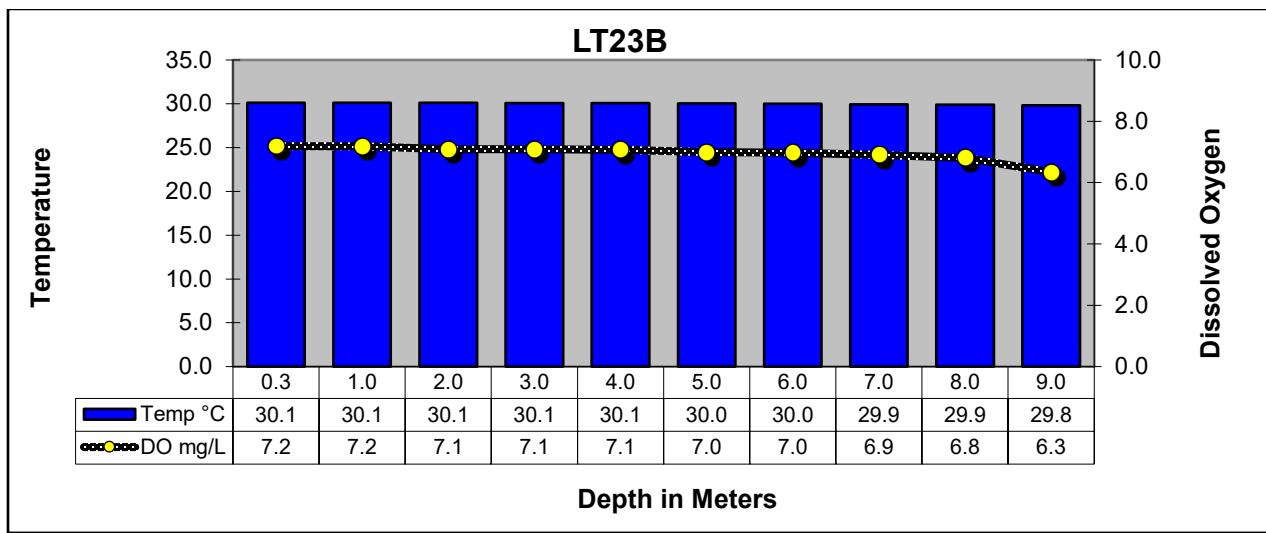

LAKE TAWAKONI AT SH276

Segment 0507

